

Energy Management Energy Meter Type EM330

CARLO GAVAZZI



- Digital input (for tariff management)
- Easy connection or wrong current direction detection
- Certified according to MID Directive (option PF only): see "how to order" below
- Other versions available (not certified, option X): see "how to order" on the next page

- Three phase energy meter
- Class 1 (kWh) according to EN62053-21
- Class B (kWh) according to EN50470-3
- Accuracy $\pm 0.5\%$ RDG (current/voltage)
- Current measurement via CT
- Backlit LCD display (3x 8-digit) with integrated touch key-pad
- Energy readout on display: 8 digit
- Variable readout on display: 4 digit
- Energy measurement: kWh and kvarh (imported/exported); kWh+ by 2 tariffs; kWh per phase
- System variables: kW, kvar, kVA, VLL, VLN, PF, Hz, kWdmd, kWdmd peak
- Phase variables: kW, kvar, kVA, VLL, VLN, A, PF
- Auxiliary power supply
- Dimensions: 3-DIN module
- Protection degree (front): IP51
- Pulse output (optional, by open collector PNP)
- RS485 Modbus port (optional)
- M-bus port (optional)
- Run hour meter
- Neutral current calculation

Product description

Three-phase energy meter with backlit LCD display with integrated touch keypad. Particularly indicated for active energy metering and for cost

allocation (CT connection), with dual tariff management availability. It can measure imported and exported energy or be programmed to consider


only the imported one. Housing for DIN-rail mounting, with IP51 front degree protection. The meter is optionally provided with pulse output proportional

to the active energy being measured, RS485 Modbus port or M-bus port. Available for legal metrology (PF option, only for imported energy).

MID

Certified according to MID Directive, Module B and Module D of Annex II, for legal metrology relevant to active electrical energy meters (see Annex V, MI003, of MID). Can be used for fiscal (legal) metrology.

How to order EM330 DIN AV5 3 H O1 PF B

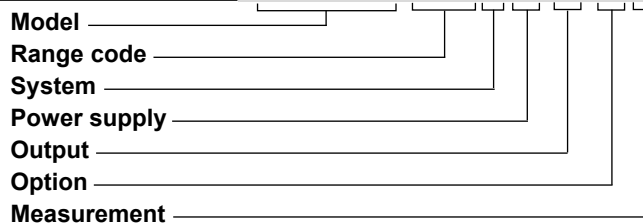

Type Selection


Range code	System	Power supply	Output
AV5: 400 VLL AC - 5(6)A (CT connection)	3: 3-phase, 3 or 4 wire	H: auxiliary power supply 90 to 260V ac/dc	O1: pulse output S1: RS485 Modbus port M1: M-bus port
Option	Measurement		
PF: Certified according to MID Directive. Can be used for fiscal (legal) metrology.	A: The power is always integrated (both in case of positive imported and negative exported power) and the total energy meter is certified according to MID. B: Only the total positive energy meter is certified according to MID.		



STANDARD

Not certified according to MID Directive. Cannot be used for fiscal (legal) metrology.

How to order EM330 DIN AV5 3 H O1 X

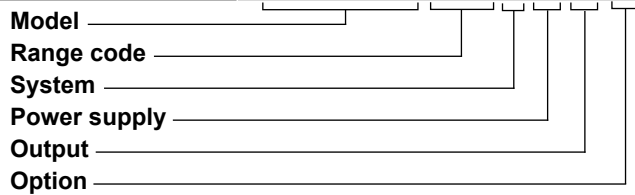

Type Selection

Range code	System	Power supply	Output
AV5: 400 VLL ac - 5(6)A (CT connection)	3: 3-phase, 3- or 4-wire; 2-phase 3-wire, 1-phase 2 wire	H: auxiliary power supply 90 to 260V ac/dc	O1: pulse output S1: RS485 Modbus port M1: M-bus port

Option

X: none

Input specifications

Rated Inputs			4096 samples/s @ 60Hz
Current type	3-phase loads, CT connection		
Current range	5(6)A	Display and touch key-pad	Type
Nominal voltage	AV5: 400 to 480 VLL ac		Backlit LCD, 3 rows by 8-digit each, h 7 mm
Accuracy (@25°C ±5°C, R.H. ≤60%, 45 to 65 Hz)		Read-out	Energy: 8 digit. Variables: 4 digit
Current	AV5: Imin=0.25A; Ib: 5A, Imax: 6A; Un: 230 to 277 VLN (400 to 480 VLL) From 0.04Ib to 0.2Ib: ±(0.5%RDG+1DGT) From 0.2Ib to Imax: ±(0.5%RDG)	Touch key	3 (DOWN, Enter and UP).
Phase-neutral voltage	In the range Un: ±(0.5% RDG)	Max. and Min. indication	Energies
Phase-phase voltage	In the range Un: ±(1% RDG)		Max. 99 999 999
Frequency	Range: 45 to 65Hz.	Variables	Max. 0.01 Min. 9999 Min. 0.01
Active power	From 0.05 In to Imax, within Un range, PF=1: ±(1% RDG) From 0.1 In to Imax, within Un range, PF=0.5L or 0.8C: ±(1% RDG)	Memory	Energy
Power factor	±[0.001+1%(1.000 - "PF RDG")]		10 ¹² cycles. Energy value is saved every time the less significant digit increases.
Reactive power	From 0.05 In to Imax, within Un range, sinphi=1: ±(2% RDG) From 0.1 In to Imax, within Un range, sinphi=0.5L or 0.8C: ±(2% RDG)	Programming parameters	10 ¹² cycles. When a parameter is modified, only the relevant memory cell is overwritten
Energies		LEDs	Flashing red light pulses according to EN50470-3, EN62052-11, 1000 imp./ kWh (min. period: 90ms) Fix orange light: wrong current direction (only with PFB option or with "B" measurement selection in case of X option)
Active energy	Class 1 according to EN62053-21 and MID Annex MI-003 Class B (Class B (kWh) according to EN50470-3)	Current overloads	Continuous
Reactive energy	Class 2 according to EN62053-23		6A, @ 50Hz
Start-up current:	10mA Self-consumption is not measured.	For 500ms	5 In
Start-up voltage	90VLN	Voltage Overloads	Continuous
Resolution	Display/serial communication		1.2 Un
Current	0.1/0.001 A	For 500ms	2 Un
Voltage	0.1/0.1 V	Input impedance	
Power	0.01 kW or kVar/ 0.1 W or var	230VL-N	1.2Mohm
Frequency	0.1 Hz/0.1Hz	5(6) A	< 1.25VA
PF	0.01/ 0.001	Wrong connection detection	Installation guide to indicate if connections are correctly carried out. Can be disabled.
Energies (positive)	0.01 kWh or kvarh / 0.1 kWh or kvarh	Phase sequence	Indicates if the phase sequence is not the correct one (L1-L2-L3)
Energies (negative)	0.01 kWh or kvarh / 0.1 kWh or kvarh	Correct current direction	Indicates if the current direction is not the right one (only with PFB option or with type "B" measurement selection in case of X option).
Energy additional errors		Load conditions	The wrong connection detection works in case of loads with: - PF>0.766 (<40°) power factor if inductive
Influence quantities	According to EN62053-21		
Temperature drift	≤200ppm/°C		
Sampling rate	4096 samples/s @ 50Hz		

Input specifications (cont.)

or PF>0.996 (<5°) if capacitive
- a current at least equal to 10% rated current (primary current transformer)

Digital input specifications

Digital inputs

Function

Number of inputs

Contact measurement voltage

Input impedance

Contact resistance

Free of voltage contact
Tariff management (switch between t1-t2)
1
5 V
1kohm
≤1kohm, close contact
≥100kohm, open contact

Overload

In case a voltage is erroneously applied to the digital input, the input is not damaged up to 30 V ac/dc.

Output specifications

RS485 serial port

Function

Protocol

Baud rate

Data format

Address

Driver input capability

Data refresh time

Read command

Rx/Tx indication

RS485 by screw connection.
For communication of measured data, programming parameters
ModBus RTU (slave function)
9.6, 19.2, 38.4, 57.6, 115.2 kbaud,
even or no parity,
1 to 247 (default: 01)
1/8 unit load. Maximum 247 devices on the same bus.
1sec
50 words available in 1 read command
Rx segment on display is shown when a valid Modbus command is sent to that specific meter
Tx segment on display is shown when a valid Modbus reply is sent back to the master

Protocol

Baud rate

Meters in the M-bus network

Primary address

Secondary address

Identification number range

Other

Static output

Purpose

Pulse rate

M-bus according to EN13757-1

0.3, 2.4, 9.6 kbaud

250

Selectable

Univocally defined in each unit

from 9000 0000 to 9999 9999

Available functions: wild card, header, initialisation SND_NKE, and req_udr management. Management of primary address modification via M-bus and reset of partial energy via M-bus available.
VIF, VIFE, DIF and DIFE: see protocol

For pulse output proportional to the active energy (kWh)
Selectable in multiple of 100

Max 500 or 1500 kWh according to pulse ON duration

M-bus port

Function

M-bus by screw connection.
For communication of measured data

Output specifications (cont.)

Pulse ON duration	Selectable: 30ms or 100 ms according to EN62052-31 Open collector PNP	Load	V_{ON} 1 V dc max. 100mA V_{OFF} 80 V dc max.
Output type			

General specifications

Operating temperature	-20 to +65 °C, indoor, (R.H. from 0 to 90% non-condensing @ 40°C)	Standard compliance	EN62052-11
Storage temperature	-30°C to +80°C (R.H. < 90% noncondensing @ 40°C)	Safety	EN62053-21, EN50470-3
Overvoltage category	Cat. III	Metrology	CE, MID (PF option only)
Insulation (for 1 minute)	4000 V ac RMS between measuring inputs and digital/serial output (see table) 4000 V ac RMS	Approvals	
Dielectric strength	4000 V ac RMS for 1 minute	Connections	
EMC	According to EN62052-11	Cable cross-section area	Voltage inputs: max. 4 mm ² , min. 1 mm ² with/without metallic cable ferrule; Max. screw tightening torque: 0.6 Nm
Electrostatic discharges	15kV air discharge;	Other terminals	1.5 mm ² , Min./Max. screws tightening torque: 0.4 Nm
Immunity to irradiated electromagnetic fields	Test with current: 10V/m from 80 to 2000MHz;	Housing	
Electromagnetic fields	Test without any current: 30V/m from 80 to 2000MHz;	Dimensions (WxHxD)	54 x 90 x 63 mm
Burst	On current and voltage measuring inputs circuit: 4kV	Material	Noryl, self-extinguishing: UL 94 V-0
Immunity to conducted disturbances	10V/m from 150KHz to 80MHz	Sealing covers	Included
Surge	On current and voltage measuring inputs circuit: 4kV;	Mounting	DIN-rail
Radio frequency	According to CISPR 22	Protection degree	
		Front	IP51
		Screw terminals	IP20
		Weight	Approx. 240 g (packing included)



Power supply specifications

Auxiliary power supply

H: 90 to 260 V ac/dc

Power consumption


≤ 1W, ≤ 10VA

Insulation (for 1 minute) between inputs and outputs


	Measuring input	Digital or serial output	Digital input
Measuring input	-	4 kV	4 kV
Digital or serial output	4 kV	-	0 kV
Digital input	4 kV	0 kV	-

Accuracy (according to EN50470-3 and EN62053-23)

kWh, accuracy (RDG) depending on the current

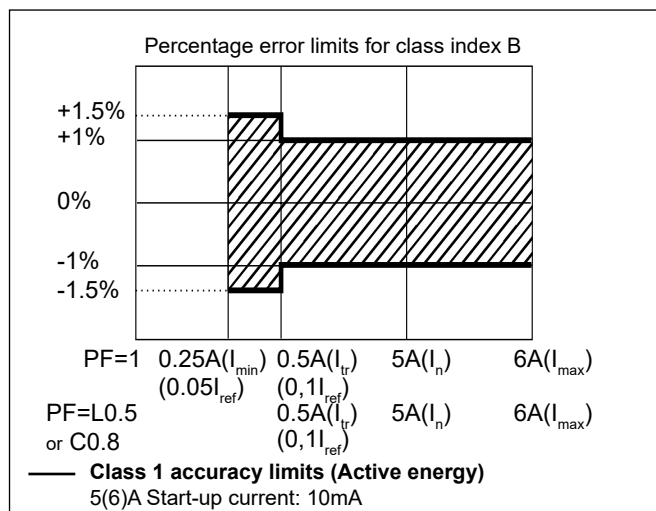

kvarh, accuracy (RDG) depending on the current

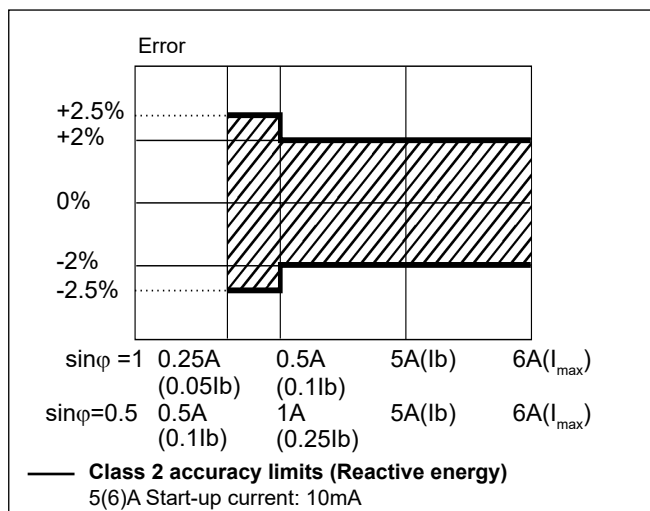

Display pages










1 st row	2 nd row	3 rd row	“Full” mode	“Easy” mode	Note
kWh+ (imported)		kW system	X	X	In case of Measurement set to “A”, total energy without considering the current direction.
kWh- (exported)		kW system	X	X	Only with Measurement set to “B”
kWh+ (imported)		V L-L system	X	X	
kWh+ (imported)		V L-N system	X	X	
kWh+ (imported)		PF system	X		
kWh+ (imported)		Hz	X		
kvarh+ (imported)		Kvar system	X	X	In case of Measurement set to “A”: total positive reactive energy without considering the current direction.
kvarh- (exported)		Kvar system	X	X	Only with Measurement set to “B”
kWh+ (imported)		kVA system	X		
kWh+ (imported)	kWdmd peak	kWdmd	X		
kWh (t1)	“t1”	kW system	X	X	Only relevant to kWh+, with Tariff menu set to ON.
kWh (t2)	“t2”	kW system	X	X	Only relevant to kWh+, with Tariff menu set to ON.
kWh L1	kWh L2	kWh L3	X		In case of Measurement set to “A”, total energy without considering the current direction. In case of Measurement set to “B”, only imported energy.
kVA L1	kVA L2	kVA L3	X		
kvar L1	kvar L2	kvar L3	X		
PF L1	PF L2	PF L3	X		
V L1-N	V L2-N	V L3-N	X		
V L1-2	V L2-3	V L3-1	X		
run hour meter		An	X		
A L1	A L2	A L3	X	X	
kW L1	kW L2	kW L3	X		

X= available








Additional available information on the display

Page	Display	Description
Info 1	YEAr (2015)	Year of production
Info 2	SErIAL n (dddnnnA)	Serial number (ddd= day of the year; nnn=progressive number; A= production line, internal use only)
Info 3	rEVIslon (A.01)	Firmware revision
Info 4	PuLS LEd	Pulse rate of front LED (pulse/kWh)
P3	SYStEM	System type
P4	CT ratio	current transformer ratio
P5	VT ratio	voltage transformer ratio
P6	MEASurE (only X option)	Measurement type
P7	InStALL	Wrong connection detection function
P8	P Int	Integration time for Wdmd calculation
P9	ModE	Set of variables on display
P10	tArIFF	Tariff enabling (and current tariff if enabled)
P11	HoME (only X option)	Selected home page
P12-1	PuLSE (O1 option)	Selection of pulse ON duration of output
P12-2	PuLrAtE (O1 option)	Selection of the pulse rate of output
P13	PrI Add (M1 option)	M-bus primary address
P14	AddrESS (S1 option)	Modbus serial address
P15	bAud (M1 or S1)	M-bus or Modbus baud rate
P16-1	PARItY (S1)	Modbus parity
P16-2	StoP blt (S1)	Stop bit (in case of No parity only)
Info 5	Secondary address (M1)	M-bus secondary address


Wiring diagrams

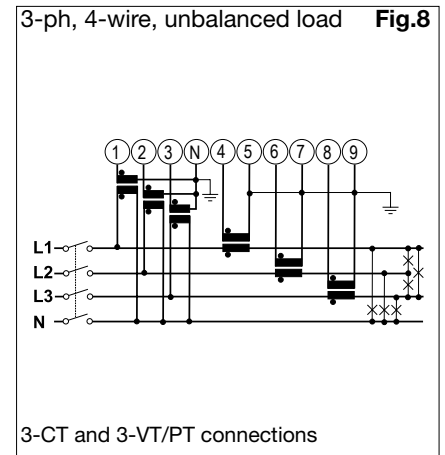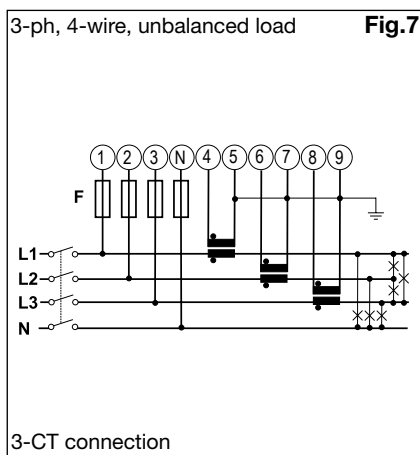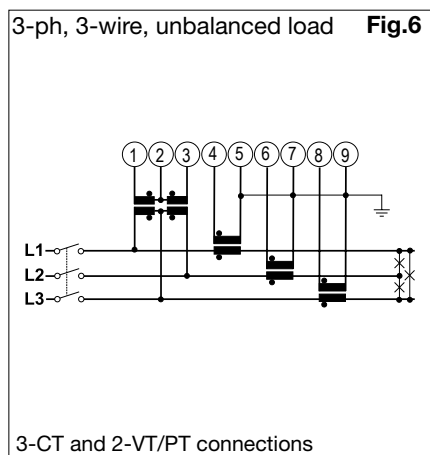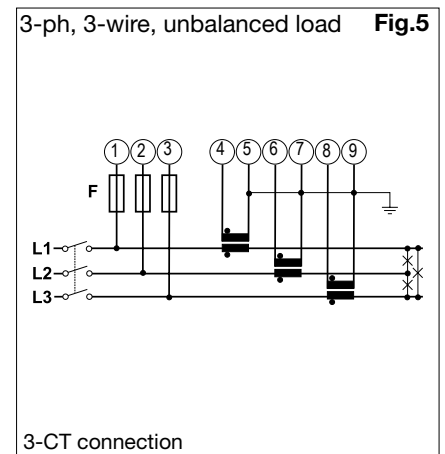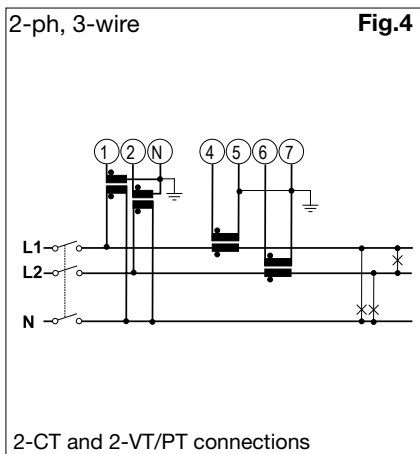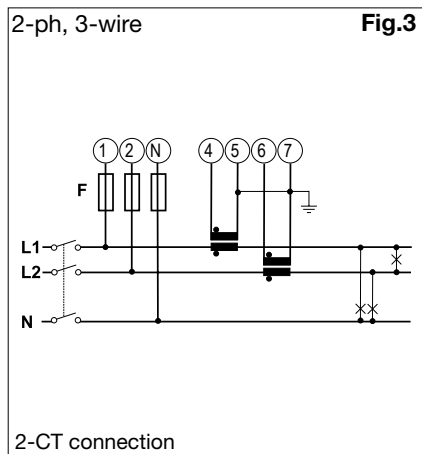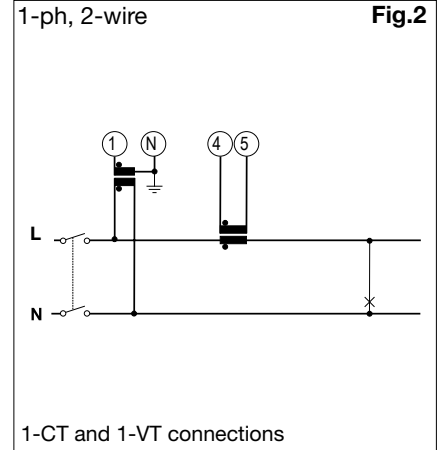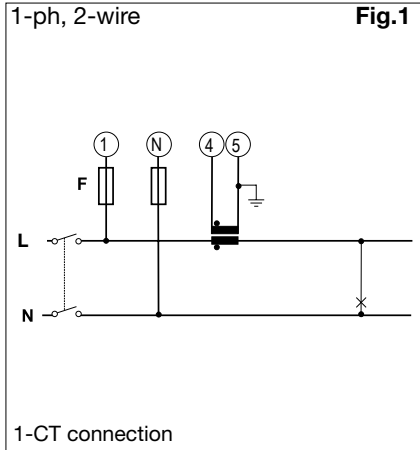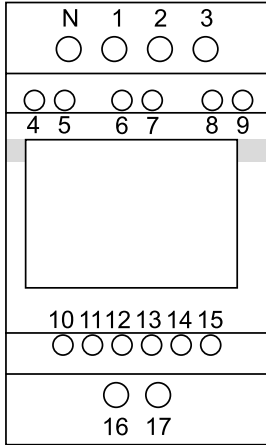

Wiring diagrams (cont.)

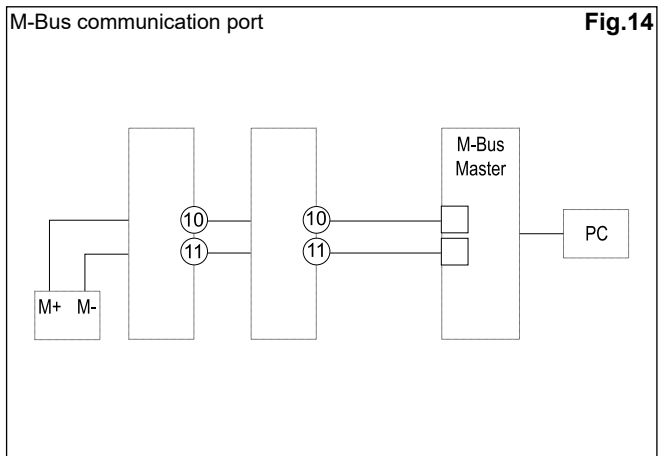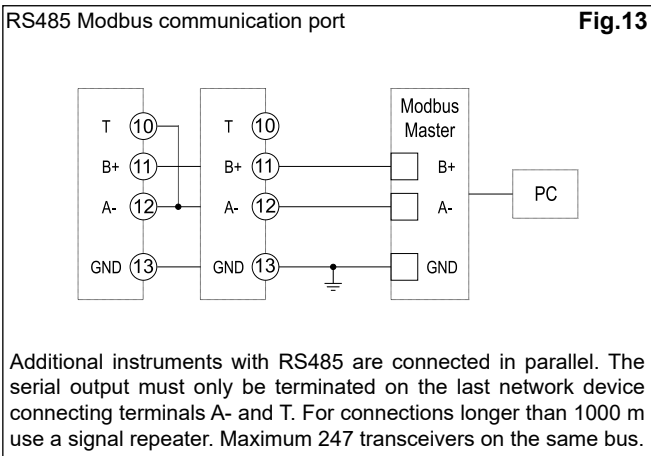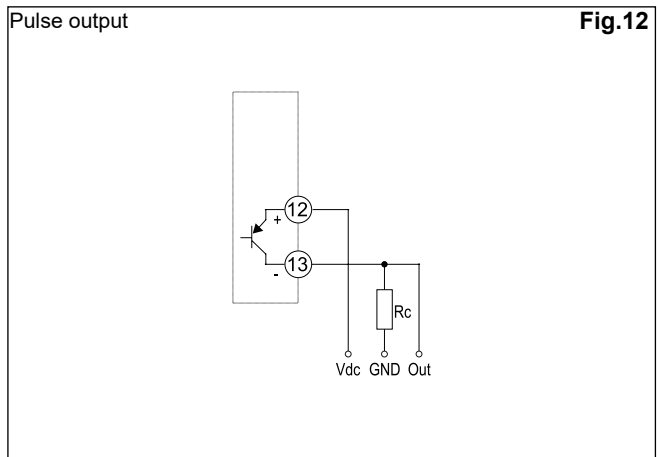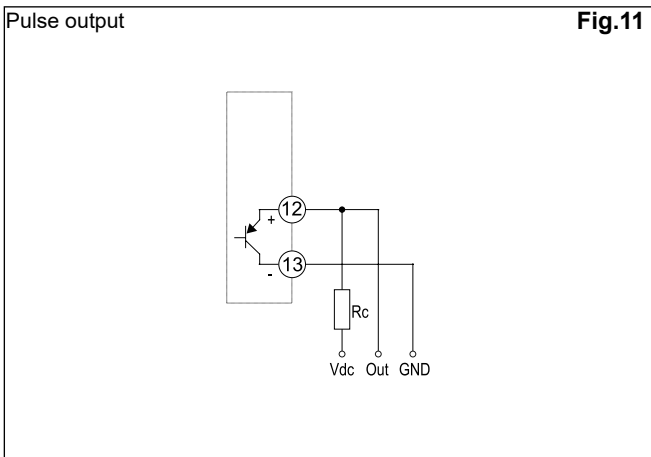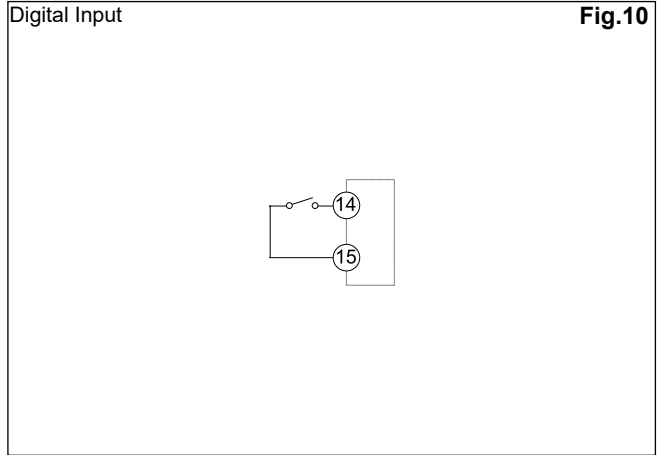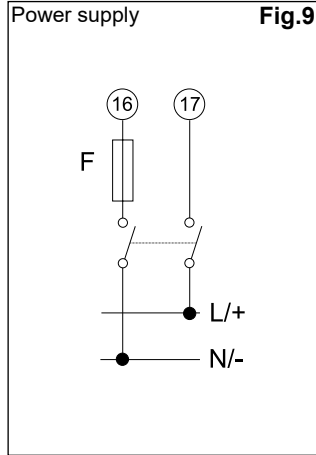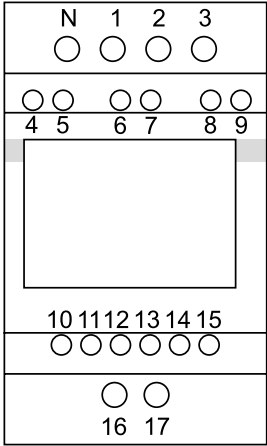

Front panel description

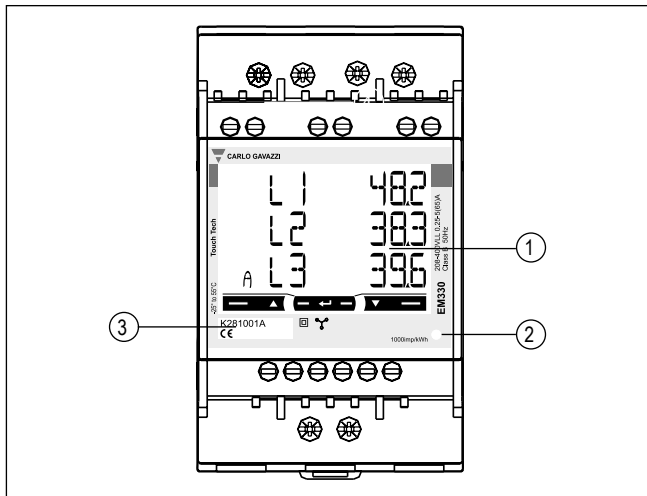

1. **Display**
Backlit LCD display with touch key-pad.
2. **LED**
LED proportional to kWh reading
3. **Serial number**
Area reserved to serial number and MID-relevant data in PF versions

Dimensions

