



Page 3-2

FOR BG SERIES MINI-CONTACTORS

- Type RF9, phase failure sensitive, manual resetting
- Type RFA9, phase failure sensitive, automatic resetting
- Type RFN9, non-phase failure sensitive, manual resetting
- Type RFNA9, non-phase failure sensitive, automatic resetting.



Page 3-4

FOR BF SERIES CONTACTORS

- Type RF38, phase failure sensitive, manual or automatic resetting
- Type RFN38, non phase failure sensitive, manual or automatic resetting
- Type RF95, phase failure sensitive, manual resetting
- Type RFA95, phase failure sensitive, automatic resetting
- Type RFN95, non phase failure sensitive, manual resetting
- Type RFNA95, non phase failure sensitive, automatic resetting.



Page 3-6

FOR B SERIES CONTACTORS

- Type RF200 and RF420, phase failure sensitive, manual or automatic resetting
- Type RFN200 and RFN420, non phase failure sensitive, manual or automatic resetting.

Type of contactor	TYPE OF THERMAL OVERLOAD RELAY				Page
	Phase failure/single phase sensitive		Non phase failure / non single phase sensitive		
	Manual/hand reset	Automatic reset	Manual/hand reset	Automatic reset	
BG06...BG12	RF9	RFA9	RFN9	RFNA9	3-2 and 3
BF09...BF38	RF38		RFN38		3-4 and 5
BF50...BF110	RF95	RFA95	RFN95	RFNA95	
B115...B180	RF200		RFN200		3-6 and 7
B250...B400	RF400		RFN400		



Page 3-9

THERMISTOR PROTECTION RELAY

- 24VDC and 24 to 240VAC supply types.

RF38 features

FRONT PROTECTION COVER OF THERMAL OVERLOAD RELAYS

A sealable protection cover is available. When fitted on to the relay front, it precludes all possible adjuster tampering and involuntary activation of the "Reset" and "Stop" buttons of the thermal overload relay.




CLEAR IDENTIFICATION OF THERMAL OVERLOAD RELAY MANUAL OR AUTOMATIC RESETTING

The RF38 thermal overload relay is supplied configured for manual resetting. Breaking the plate below the "Reset" button allows for the automatic resetting configuration.



FIXING EASE OF THE THERMAL OVERLOAD RELAY

While the thermal overload relay is being linked to the contactor, its auxiliary contact fits on and connects to the coil terminal by rigid terminal. Complete relay fixing is done in a single operation, with no need of other connections.



SEALABLE RELAY COVER

A handy closing flap feature excludes any tampering of the thermal overload relay adjuster.





- Thermal overload relays for currents between 0.09 and 420A
- Phase failure sensitive and non phase failure sensitive versions
- Automatic and/or manual resetting
- Independent or direct mounting on contactor
- Thermistor protection relay.

	SEC. - PAGE
Thermal overload relays	
For BG series mini-contactors	3 - 2
For BF series contactors	3 - 4
For B series contactors	3 - 6
Accessories	3 - 8
Electronic relay	
Thermistor protection relay	3 - 9
Dimensions	3 - 10
Wiring diagrams	3 - 11
Technical characteristics	3 - 12

Phase failure / single phase sensitive Three poles (three phase)

3



11 RF9...



11 RFA9...

Order code	Adjustment range	Protection fuses IEC			Qty per pkg	Wt [kg]
		aM	gG	UL K5		
	[A]	[A]	[A]	[A]	n°	[kg]

MANUAL RESETTING.

Direct mounting on BG06, BG09, BG12 mini-contactors.

11 RF9 015	0.09 - 0.15	0.25	—	—	1	0.116
11 RF9 023	0.14 - 0.23	0.5	—	1	1	0.116
11 RF9 033	0.2 - 0.33	0.5	1	1	1	0.116
11 RF9 05	0.3 - 0.5	1	2	3	1	0.116
11 RF9 075	0.45 - 0.75	1	2	3	1	0.116
11 RF9 1	0.6 - 1	2	4	3	5	0.116
11 RF9 1V5	0.9 - 1.5	2	4	6	5	0.116
11 RF9 2V3	1.4 - 2.3	4	6	10	5	0.116
11 RF9 33	2 - 3.3	4	10	10	5	0.116
11 RF9 5	3 - 5	6	16	15	5	0.116
11 RF9 75	4.5 - 7.5	8	20	25	5	0.116
11 RF9 10	6 - 10	10	32	30	5	0.116
11 RF9 15	9 - 15	16	40	45	5	0.116

AUTOMATIC RESETTING.

Direct mounting on BG06, BG09, BG12 mini-contactors.

11 RFA9 015	0.09 - 0.15	0.25	—	—	1	0.116
11 RFA9 023	0.14 - 0.23	0.5	—	1	1	0.116
11 RFA9 033	0.2 - 0.33	0.5	1	1	1	0.116
11 RFA9 05	0.3 - 0.5	1	2	3	1	0.116
11 RFA9 075	0.45 - 0.75	1	2	3	1	0.116
11 RFA9 1	0.6 - 1	2	4	3	1	0.116
11 RFA9 1V5	0.9 - 1.5	2	4	6	1	0.116
11 RFA9 2V3	1.4 - 2.3	4	6	10	1	0.116
11 RFA9 33	2 - 3.3	4	10	10	1	0.116
11 RFA9 5	3 - 5	6	16	15	1	0.116
11 RFA9 75	4.5 - 7.5	8	20	25	1	0.116
11 RFA9 10	6 - 10	10	32	30	1	0.116
11 RFA9 15	9 - 15	16	40	45	1	0.116

NOTE: Two-pole (single phase) versions are available on request.

Add the letter "S" in the order code e.g. 11RF9015 is three pole; 11RFS9015 two pole.

The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

Three-phase IEC motor powers ①

230V	400V	415V	440V	500V	690V
[kW]	[kW]	[kW]	[kW]	[kW]	[kW]


0.37	0.37	0.37	0.37	0.37	0.37
0.55	0.55	0.55	0.55	0.55	0.55
0.75	0.75	0.75	0.75	0.75	0.75
1.1	1.1	1.1	1.1	1.1	1.1
1.5	1.5	1.5	1.5	1.5	1.5
2.2	2.2	2.2	2.2	2.2	2.2
3	3	3	3	3	3
4	4	4	4	4	4
5.5	5.5	5.5	5.5	5.5	5.5
7.5	7.5	7.5	7.5	7.5	7.5
11	11	11	11	11	11
15	15	15	15	15	15
22	22	22	22	22	22
30	30	30	30	30	30
37	37	37	37	37	37
45	45	45	45	45	45
55	55	55	55	55	55
75	75	75	75	75	75
90	90	90	90	90	90
110	110	110	110	110	110
150	150	150	150	150	150
200	200	200	200	200	200
250	250	250	250	250	250
300	300	300	300	300	300
350	350	350	350	350	350
400	400	400	400	400	400
450	450	450	450	450	450
500	500	500	500	500	500
550	550	550	550	550	550
600	600	600	600	600	600
650	650	650	650	650	650
700	700	700	700	700	700
750	750	750	750	750	750
800	800	800	800	800	800
850	850	850	850	850	850
900	900	900	900	900	900
950	950	950	950	950	950
1000	1000	1000	1000	1000	1000

0.37	0.37	0.37	0.37	0.37	0.37
0.55	0.55	0.55	0.55	0.55	0.55
0.75	0.75	0.75	0.75	0.75	0.75
1.1	1.1	1.1	1.1	1.1	1.1
1.5	1.5	1.5	1.5	1.5	1.5
2.2	2.2	2.2	2.2	2.2	2.2
3	3	3	3	3	3
4	4	4	4	4	4
5.5	5.5	5.5	5.5	5.5	5.5
7.5	7.5	7.5	7.5	7.5	7.5
11	11	11	11	11	11
15	15	15	15	15	15
22	22	22	22	22	22
30	30	30	30	30	30
37	37	37	37	37	37
45	45	45	45	45	45
55	55	55	55	55	55
75	75	75	75	75	75
90	90	90	90	90	90
110	110	110	110	110	110
150	150	150	150	150	150
200	200	200	200	200	200
250	250	250	250	250	250
300	300	300	300	300	300
350	350	350	350	350	350
400	400	400	400	400	400
450	450	450	450	450	450
500	500	500	500	500	500
550	550	550	550	550	550
600	600	600	600	600	600
650	650	650	650	650	650
700	700	700	700	700	700
750	750	750	750	750	750
800	800	800	800	800	800
850	850	850	850	850	850
900	900	900	900	900	900
950	950	950	950	950	950
1000	1000	1000	1000	1000	1000

① The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

② No standard power ratings exist; select relay according to current consumption.

NOTE: To facilitate connection between the auxiliary NC contact of the RF...9 thermal relay and terminal A2 of the contactor, insert the conductor into the appropriate conduit as shown.



Certifications and compliance

Certifications obtained:

Type	cULus	CSA	EAC	CCC
RF9... - RFA9...	●	●	●	●

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating; the trip current is 120% FLA.
CSA – CSA certified for Canada only (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

Motor protection relays

Thermal overload relays for BG series mini-contactors

Non phase failure / non single phase sensitive Three poles (three phase)



11 RFN9...



11 RFNA9...

Order code	Adjustment range	Protection fuses IEC			Qty per pkg	Wt [kg]
		aM	gG	UL K5		
	[A]	[A]	[A]	[A]	n°	
MANUAL RESETTING. Direct mounting on BG06, BG09, BG12 mini-contactors.						
11 RFN9 015	0.09 - 0.15	0.25	—	—	1	0.123
11 RFN9 023	0.14 - 0.23	0.5	—	1	1	0.123
11 RFN9 033	0.2 - 0.33	0.5	1	1	1	0.123
11 RFN9 05	0.3 - 0.5	1	2	3	1	0.123
11 RFN9 075	0.45 - 0.75	1	2	3	1	0.123
11 RFN9 1	0.6 - 1	2	4	3	1	0.123
11 RFN9 1V5	0.9 - 1.5	2	4	6	1	0.123
11 RFN9 2V3	1.4 - 2.3	4	6	10	1	0.123
11 RFN9 33	2 - 3.3	4	10	10	1	0.123
11 RFN9 5	3 - 5	6	16	15	1	0.123
11 RFN9 75	4.5 - 7.5	8	20	25	1	0.123
11 RFN9 10	6 - 10	10	32	30	1	0.123
11 RFN9 15	9 - 15	16	40	45	1	0.123

AUTOMATIC RESETTING. Direct mounting on BG06, BG09, BG12 mini-contactors.						
Order code	Adjustment range	Protection fuses IEC			Qty per pkg	Wt [kg]
		aM	gG	UL K5		
	[A]	[A]	[A]	[A]	n°	
11 RFNA9 015	0.09 - 0.15	0.25	—	—	1	0.123
11 RFNA9 023	0.14 - 0.23	0.5	—	1	1	0.123
11 RFNA9 033	0.2 - 0.33	0.5	1	1	1	0.123
11 RFNA9 05	0.3 - 0.5	1	2	3	1	0.123
11 RFNA9 075	0.45 - 0.75	1	2	3	1	0.123
11 RFNA9 1	0.6 - 1	2	4	3	1	0.123
11 RFNA9 1V5	0.9 - 1.5	2	4	6	1	0.123
11 RFNA9 2V3	1.4 - 2.3	4	6	10	1	0.123
11 RFNA9 33	2 - 3.3	4	10	10	1	0.123
11 RFNA9 5	3 - 5	6	16	15	1	0.123
11 RFNA9 75	4.5 - 7.5	8	20	25	1	0.123
11 RFNA9 10	6 - 10	10	32	30	1	0.123
11 RFNA9 15	9 - 15	16	40	45	1	0.123

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

Three-phase IEC motor powers ①

230V [kW]	400V [kW]	415V [kW]	440V [kW]	500V [kW]	690V [kW]
0.37	0.37	0.37	0.37	0.37	0.37
0.55	0.55	0.55	0.55	0.55	0.55
0.75	0.75	0.75	0.75	0.75	0.75
1.1	1.1	1.1	1.1	1.1	1.1
1.5	1.5	1.5	1.5	1.5	1.5
2.2	2.2	2.2	2.2	2.2	2.2
3	3	3	3	3	3
4	4	4	4	4	4
5.5	5.5	5.5	5.5	5.5	5.5
7.5	7.5	7.5	7.5	7.5	7.5
11	11	11	11	11	11
15	15	15	15	15	15
22	22	22	22	22	22
30	30	30	30	30	30
37	37	37	37	37	37
45	45	45	45	45	45
55	55	55	55	55	55
75	75	75	75	75	75
90	90	90	90	90	90
110	110	110	110	110	110
150	150	150	150	150	150
200	200	200	200	200	200
250	250	250	250	250	250
300	300	300	300	300	300
370	370	370	370	370	370
450	450	450	450	450	450
550	550	550	550	550	550
750	750	750	750	750	750
900	900	900	900	900	900
1100	1100	1100	1100	1100	1100
1500	1500	1500	1500	1500	1500
2000	2000	2000	2000	2000	2000
2500	2500	2500	2500	2500	2500
3000	3000	3000	3000	3000	3000
3700	3700	3700	3700	3700	3700
4500	4500	4500	4500	4500	4500
5500	5500	5500	5500	5500	5500
7500	7500	7500	7500	7500	7500
9000	9000	9000	9000	9000	9000
11000	11000	11000	11000	11000	11000
15000	15000	15000	15000	15000	15000
20000	20000	20000	20000	20000	20000
25000	25000	25000	25000	25000	25000
30000	30000	30000	30000	30000	30000
37000	37000	37000	37000	37000	37000
45000	45000	45000	45000	45000	45000
55000	55000	55000	55000	55000	55000
75000	75000	75000	75000	75000	75000
90000	90000	90000	90000	90000	90000
110000	110000	110000	110000	110000	110000
150000	150000	150000	150000	150000	150000
200000	200000	200000	200000	200000	200000
250000	250000	250000	250000	250000	250000
300000	300000	300000	300000	300000	300000
370000	370000	370000	370000	370000	370000
450000	450000	450000	450000	450000	450000
550000	550000	550000	550000	550000	550000
750000	750000	750000	750000	750000	750000
900000	900000	900000	900000	900000	900000
1100000	1100000	1100000	1100000	1100000	1100000
1500000	1500000	1500000	1500000	1500000	1500000
2000000	2000000	2000000	2000000	2000000	2000000
2500000	2500000	2500000	2500000	2500000	2500000
3000000	3000000	3000000	3000000	3000000	3000000
3700000	3700000	3700000	3700000	3700000	3700000
4500000	4500000	4500000	4500000	4500000	4500000
5500000	5500000	5500000	5500000	5500000	5500000
7500000	7500000	7500000	7500000	7500000	7500000
9000000	9000000	9000000	9000000	9000000	9000000
11000000	11000000	11000000	11000000	11000000	11000000
15000000	15000000	15000000	15000000	15000000	15000000
20000000	20000000	20000000	20000000	20000000	20000000
25000000	25000000	25000000	25000000	25000000	25000000
30000000	30000000	30000000	30000000	30000000	30000000
37000000	37000000	37000000	37000000	37000000	37000000
45000000	45000000	45000000	45000000	45000000	45000000
55000000	55000000	55000000	55000000	55000000	55000000
75000000	75000000	75000000	75000000	75000000	75000000
90000000	90000000	90000000	90000000	90000000	90000000
110000000	110000000	110000000	110000000	110000000	110000000
150000000	150000000	150000000	150000000	150000000	150000000
200000000	200000000	200000000	200000000	200000000	200000000
250000000	250000000	250000000	250000000	250000000	250000000
300000000	300000000	300000000	300000000	300000000	300000000
370000000	370000000	370000000	370000000	370000000	370000000
450000000	450000000	450000000	450000000	450000000	450000000
550000000	550000000	550000000	550000000	550000000	550000000
750000000	750000000	750000000	750000000	750000000	750000000
900000000	900000000	900000000	900000000	900000000	900000000
1100000000	1100000000	1100000000	1100000000	1100000000	1100000000
1500000000	1500000000	1500000000	1500000000	1500000000	1500000000
2000000000	2000000000	2000000000	2000000000	2000000000	2000000000
2500000000	2500000000	2500000000	2500000000	2500000000	2500000000
3000000000	3000000000	3000000000	3000000000	3000000000	3000000000
3700000000	3700000000	3700000000	3700000000	3700000000	3700000000
4500000000	4500000000	4500000000	4500000000	4500000000	4500000000
5500000000	5500000000	5500000000	5500000000	5500000000	5500000000
7500000000	7500000000	7500000000	7500000000	7500000000	7500000000
9000000000	9000000000	9000000000	9000000000	9000000000	9000000000
11000000000	11000000000	11000000000	11000000000	11000000000	11000000000
15000000000	15000000000	15000000000	15000000000	15000000000	15000000000
20000000000	20000000000	20000000000	20000000000	20000000000	20000000000
25000000000	25000000000	25000000000	25000000000	25000000000	25000000000
30000000000	30000000000	30000000000	30000000000	30000000000	30000000000
37000000000	37000000000	37000000000	37000000000	37000000000	37000000000
45000000000	45000000000	45000000000	45000000000	45000000000	45000000000
55000000000	55000000000	55000000000	55000000000	55000000000	55000000000
75000000000	75000000000	75000000000	75000000000	75000000000	75000000000
90000000000	90000000000	90000000000	90000000000	90000000000	90000000000
110000000000	110000000000	110000000000	110000000000	110000000000	110000000000
150000000000	150000000000	150000000000	150000000000	150000000000	150000000000
200000000000	200000000000	200000000000	200000000000	200000000000	200000000000
250000000000	250000000000	250000000000	250000000000	250000000000	250000000000
300000000000	300000000000	300000000000	300000000000	300000000000	300000000000
370000000000	370000000000	370000000000	370000000000	370000000000	370000000000
450000000000	450000000000	450000000000	450000000000	450000000000	450000000000
550000000000	550000000000	550000000000	550000000000	550000000000	550000000000
750000000000	750000000000	750000000000	750000000000	750000000000	750000000000
900000000000	900000000000	900000000000	900000000000	900000000000	900000000000
1100000000000	1100000000000	1100000000000	1100000000000	1100000000000	1100000000000
1500000000000	1500000000000	1500000000000	1500000000000	1500000000000	1500000000000
2000000000000	2000000000000	2000000000000	2000000000000	2000000000000	2000000000000
2500000000000	2500000000000	2500000000000	2500000000000</		

Motor protection relays

Thermal overload relays for BF series contactors

Phase failure / single phase sensitive Three poles (three phase)

3



RF38...

Order code	Adjustment range	Protection fuses IEC			Qty per pkg	Wt [kg]
		aM	gG	UL ①		
	[A]	[A]	[A]	[A]	n°	[kg]

MANUAL OR AUTOMATIC RESETTING.
Direct mounting on BF09 - BF38 contactors.
Independent mounting with RFX38 04 base.

RF38 0016	0.1-0.16	0.25	—	1	1	0.160
RF38 0025	0.16-0.25	0.5	—	1	1	0.160
RF38 0040	0.25-0.4	0.5	1	3	1	0.160
RF38 0063	0.4-0.63	1	2	3	1	0.160
RF38 0100	0.63-1	2	4	3	5	0.160
RF38 0160	1-1.6	2	4	6	5	0.160
RF38 0250	1.6-2.5	4	6	10	5	0.160
RF38 0400	2.5-4	4	6	15	5	0.160
RF38 0650	4-6.5	8	16	25	5	0.160
RF38 1000	6.3-10	10	20	40	5	0.160
RF38 1400	9-14	16	32	50	5	0.160
RF38 1800	13-18	25	40	70	5	0.160
RF38 2300	17-23	25	50	90	5	0.160
RF38 2500	20-25	32	50	100	5	0.160
RF38 3200	24-32	40	63	120	1	0.160
RF38 3800	32-38	40	63	150	1	0.160

MANUAL RESETTING.
Direct mounting on BF50-BF110 contactors.
Complete with G261 links.
Independent mounting with G270 base.

11 RF95 3 33	20 - 33	40	63	110	1	0.365
11 RF95 3 42	28 - 42	50	80	150	1	0.365
11 RF95 3 50	35 - 50	50	100	175	1	0.365
11 RF95 3 65	46 - 65	80	125	200	1	0.365
11 RF95 3 82	60 - 82	100	200	250	1	0.365
11 RF95 3 95	70 - 95	100	200	350	1	0.365
11 RF95 3 110	90 - 110	125	200	350	1	0.365

AUTOMATIC RESETTING.
Direct mounting on BF50-BF110 contactors.
Complete with G261 links.
Independent mounting with G270 base.

11 RFA95 3 33	20 - 33	40	63	110	1	0.365
11 RFA95 3 42	28 - 42	50	80	150	1	0.365
11 RFA95 3 50	35 - 50	50	100	175	1	0.365
11 RFA95 3 65	46 - 65	80	125	200	1	0.365
11 RFA95 3 82	60 - 82	100	200	250	1	0.365
11 RFA95 3 95	70 - 95	100	200	350	1	0.365
11 RFA95 3 110	90 - 110	125	200	350	1	0.365

① UL RK5 fuse class for RF38 types and UL K5 fuse class for RF...95 types.

NOTE: Two pole (single phase) versions are available on request.
Add the letter "S" in the order code e.g. RF381000 is three pole; RFS381000 two pole.

The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.



11 RF95 3...



11 RFA95 3...

Three-phase IEC motor powers ②

230V [kW]	400V [kW]	415V [kW]	440V [kW]	500V [kW]	690V [kW]
-----------	-----------	-----------	-----------	-----------	-----------

0.06	0.06	0.06	0.06-0.09	0.06-0.09	0.09-0.12
0.06	0.09	0.09	0.12	0.12	0.18
0.09	0.12-0.18	0.12-0.18	0.18	0.18	0.25
0.12	0.25	0.25	0.37	0.25-0.37	0.37-0.55
0.18-0.25	0.37-0.55	0.37-0.55	0.55	0.55-0.75	0.75
0.37	0.75	0.75	0.75-1.1	1.1	1.1-1.5
0.55-0.75	1.1-1.5	1.1-1.5	1.1	1.5-2.2	2.2-3
1.1-1.5	2.2	2.2	2.2-3	3	4
1.5-2.2	3-4	4	4	4-5.5	5.5-7.5
3	5.5	5.5	5.5-7.5	5.5-7.5	11
4	7.5	7.5-9	9	11	15
5.5	11	9-11	11	11	18.5
5.5	11	11	11	15	22
7.5	15	15	15	18.5	30
11	18.5	18.5	18.5	22	30

7.5	11-15	11-15	15-18.5	15-18.5	22-25
9-10	15-18.5	18.5-22	18.5-22	22-25	30-33
10-11	22	25	25	30	37-40
15-18.5	25-30	30-33	30-33	33-40	45-55
22	33-40	37-45	37-45	45-55	59-75
22-25	40-45	45-51	45-55	55-63	75-80
30	55	55	55	75	90

7.5	11-15	11-15	15-18.5	15-18.5	22-25
9-10	15-18.5	18.5-22	18.5-22	22-25	30-33
10-11	22	25	25	30	37-40
15-18.5	25-30	30-33	30-33	33-40	45-55
22	33-40	37-45	37-45	45-55	59-75
22-25	40-45	45-51	45-55	55-63	75-80
30	55	55	55	75	90

② No standard powers ratings exist; select relay according to current consumption.

③ The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

Certifications and compliance

Certifications obtained:

Typo	cULus	CSA	EAC	CCC	Register of shipping LORS
RF38	●	—	●	●	—
RF95	●	●	●	●	●
RFA95	●	●	●	●	—

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 82A FLA range and 10000 Amps RMS for 95A and 110A FLA range; the trip current is 120% FLA.
CSA – CSA certified for Canada only (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

Motor protection relays

Thermal overload relays for BF series contactors

Non phase failure / non single phase sensitive Three poles (three phase)



RFN38...

Order code	Adjustment range	Protection fuses IEC			Qty per pkg	Wt [kg]
		aM	gG	UL ①		
	[A]	[A]	[A]	[A]	n°	[kg]

MANUAL OR AUTOMATIC RESETTING.
Direct mounting on BF09 - BF38 contactors.
Independent mounting with RFX38 04 base.

RFN38 0016	0.1-0.16	0.25	—	1	1	0.160
RFN38 0025	0.16-0.25	0.5	—	1	1	0.160
RFN38 0040	0.25-0.4	0.5	1	3	1	0.160
RFN38 0063	0.4-0.63	1	2	3	1	0.160
RFN38 0100	0.63-1	2	4	3	1	0.160
RFN38 0160	1-1.6	2	4	6	1	0.160
RFN38 0250	1.6-2.5	4	6	10	1	0.160
RFN38 0400	2.5-4	4	6	15	1	0.160
RFN38 0650	4-6.5	8	16	25	1	0.160
RFN38 1000	6.3-10	10	20	40	1	0.160
RFN38 1400	9-14	16	32	50	1	0.160
RFN38 1800	13-18	25	40	70	1	0.160
RFN38 2300	17-23	25	50	90	1	0.160
RFN38 2500	20-25	32	50	100	1	0.160
RFN38 3200	24-32	40	63	125	1	0.160
RFN38 3800	32-38	40	63	150	1	0.160

MANUAL RESETTING.
Direct mounting on BF50-BF110 contactors.
Complete with G261 links.
Independent mounting with G270 base.

11 RFN95 3 42	28 - 42	50	80	150	1	0.365
11 RFN95 3 50	35 - 50	50	100	175	1	0.365
11 RFN95 3 65	46 - 65	80	125	200	1	0.365
11 RFN95 3 82	60 - 82	100	200	250	1	0.365
11 RFN95 3 95	70 - 95	100	200	350	1	0.365
11 RFN95 3 110	90 - 110	125	200	350	1	0.365

AUTOMATIC RESETTING.
Direct mounting on BF50-BF110 contactors.
Complete with G261 links.
Independent mounting with G270 base.

11 RFNA95 3 42	28 - 42	50	80	150	1	0.365
11 RFNA95 3 50	35 - 50	50	100	175	1	0.365
11 RFNA95 3 65	46 - 65	80	125	200	1	0.365
11 RFNA95 3 82	60 - 82	100	200	250	1	0.365
11 RFNA95 3 95	70 - 95	100	200	350	1	0.365
11 RFNA95 3 110	90 - 110	125	200	350	1	0.365

① UL RK5 fuse class for RFN38 types and UL K5 fuse class for RF...95 types.

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.



11 RFN95 3...



11 RFNA95 3...

Three-phase IEC motor powers ②

230V	400V	415V	440V	550V	690V
[kW]	[kW]	[kW]	[kW]	[kW]	[kW]

0.06	0.06	0.06	0.06-0.09	0.06-0.09	0.09-0.12
0.09	0.12-0.18	0.12-0.18	0.18	0.18	0.25
0.12	0.25	0.25	0.37	0.25-0.37	0.37-0.55
0.18-0.25	0.37-0.55	0.37-0.55	0.55	0.55-0.75	0.75
0.37	0.75	0.75	0.75-1.1	1.1	1.1-1.5
0.55-0.75	1.1-1.5	1.1-1.5	1.1	1.5-2.2	2.2-3
1.1-1.5	2.2	2.2	2.2-3	3	4
1.5-2.2	3-4	4	4	4-5.5	5.5-7.5
3	5.5	5.5	5.5-7.5	5.5-7.5	11
4	7.5	7.5-9	9	11	15
5.5	11	9-11	11	11	18.5
5.5	11	11	11	15	22
7.5	15	15	15	18.5	30
11	18.5	18.5	18.5	22	30

9-10	15-18.5	18.5-22	18.5-22	22-25	30-33
10-11	22	25	25	30	37-40
15-18.5	25-30	30-33	30-33	33-40	45-55
22	33-40	37-45	37-45	45-55	59-75
22-25	40-45	45-51	45-55	55-63	75-80
30	55	55	55	75	90

9-10	15-18.5	18.5-22	18.5-22	22-25	30-33
10-11	22	25	25	30	37-40
15-18.5	25-30	30-33	30-33	33-40	45-55
22	33-40	37-45	37-45	45-55	59-75
22-25	40-45	45-51	45-55	55-63	75-80
30	55	55	55	75	90

② No standard power ratings exist; select relay according to current consumption.

③ The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

Certifications and compliance

Certifications obtained:

Type	cULus	CSA	EAC	CCC
RFN38	●	—	●	●
RFN95	●	●	●	●
RFNA95	●	●	●	●

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 82A FLA range and 10000 Amps RMS for 95A and 110A FLA range; the trip current is 120% FLA.
CSA – CSA certified for Canada only (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

Motor protection relays


Thermal overload relays for B series contactors

Phase failure / single phase sensitive Three poles (three phase)

3



RF200... - RF420...

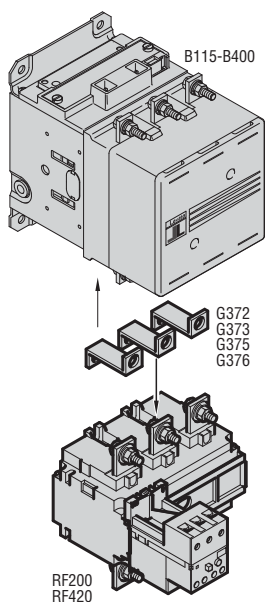

Order code	Adjustment range	Protection fuses IEC			Qty per pkg	Wt [kg]
		aM	gG	UL K5		
	[A]	[A]	[A]	[A]	n°	

MANUAL OR AUTOMATIC RESETTING.

Independent screw fixing or direct mounting on contactors:
B115-B145-B180 using G372 links
B250-B310-B400 using G373 links

RF200 100	60-100	100	160	500	1	2.150
RF200 125	75-125	125	200	500	1	2.150
RF200 150	90-150	160	250	500	1	2.150
RF200 200	120-200	200	315	500	1	2.150

Independent screw fixing or direct mounting on contactors:
B145-B180 using G375 links
B250-B310-B400 using G376 links

RF420 250	150-250	250	400	800	1	2.460
RF420 300	180-300	315	500	800	1	2.460
RF420 420	250-420	500	630	800	1	2.460

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

RELAYS FOR B500 AND B630 CONTACTORS

MANUAL OR AUTOMATIC RESETTING.

Consult Customer Service for the relative order codes and detailed information; see contact details on inside front cover.

Three-phase IEC motor powers

230V	400V	415V	440V	550V	690V
[kW]	[kW]	[kW]	[kW]	[kW]	[kW]

18.5-25	33-51	37-55	37-59	45-63	59-92
22-37	40-63	45-63	51-75	55-80	75-110
25-45	51-80	55-80	55-92	63-100	92-140
37-59	75-100	75-100	75-110	92-140	129-184

45-75	92-132	92-147	100-150	110-162	140-220
55-92	100-162	110-162	129-184	129-198	180-280
75-110	129-198	147-220	150-220	180-280	250-368

NOTE: For 1000V powers, consult Customer Service for information; see contact details on inside front cover.

① The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

Certifications and compliance

Certifications obtained:

Type	C U L s	E A C
RF200	●	●
RF420	●	●

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 150A FLA range, 10000 Amps RMS for 200A up to 300A FLA range and 18000 Amps for the 420A; the trip current is 120% FLA.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.


Motor protection relays

Thermal overload relays for B series contactors

Non phase failure / non single phase sensitive
Three poles (three phase)



RFN200... - RFN420...

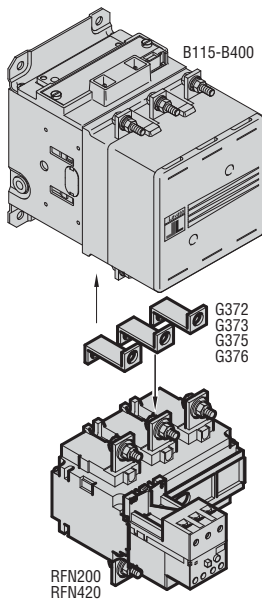

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM	gG	UL K5		
	[A]	[A]	[A]	[A]	n°	

MANUAL OR AUTOMATIC RESETTING.
Independent screw fixing or direct mounting on contactors:
B115-B145-B180 using G372 links
B250-B310-B400 using G373 links

RFN200 100	60-100	100	160	500	1	2.150
RFN200 125	75-125	125	200	500	1	2.150
RFN200 150	90-150	160	250	500	1	2.150
RFN200 200	120-200	200	315	500	1	2.150

Independent screw fixing or direct mounting on contactors:
B145-B180 using G375 links
B250-B310-B400 using G376 links

RFN420 250	150-250	250	400	800	1	2.460
RFN420 300	180-300	315	500	800	1	2.460
RFN420 420	250-420	500	630	800	1	2.460

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

RELAYS FOR B500 AND B630 CONTACTORS.

MANUAL OR AUTOMATIC RESETTING.
Consult Customer Service for the relative order codes and detailed information; see contact details on inside front cover.

Three-phase IEC motor powers

230V [kW]	400V [kW]	415V [kW]	440V [kW]	550V [kW]	690V [kW]
-----------	-----------	-----------	-----------	-----------	-----------

18.5-25	33-51	37-55	37-59	45-63	59-92
22-37	40-63	45-63	51-75	55-80	75-110
25-45	51-80	55-80	55-92	63-100	92-140
37-59	75-100	75-100	75-110	92-140	129-184

45-75	92-132	92-147	100-150	110-162	140-220
55-92	100-162	110-162	129-184	129-198	180-280
75-110	129-198	147-220	150-220	180-280	250-368

NOTE: For 1000V powers, consult Customer Service for information; see contact details on inside front cover.

① The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

Certifications and compliance

Certifications obtained:

Type	C U L U s	E A C
RFN200	●	●
RFN420	●	●

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 150A FLA range, 10000 Amps RMS for 200A up to 300A FLA range and 18000 Amps for the 420A; the trip current is 120% FLA.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

3



RFX38 02



RFX38 03



11 G262



RFX38 04



11 G228

11 G244

Order code	For relay	Qty per pkg	Wt
		n°	[kg]

Set of links for direct contactor mounting.

11 G372	RF...200 on contactor	B115-B145-B180	1	0.250
11 G373	RF...200 on contactor	B250-B310-B400	1	0.360
11 G375	RF...420 on contactor	B145-B180	1	0.313
11 G376	RF...420 on contactor	B250-B310-B400	1	0.500

Protection cover for thermal overload relay-contactor assembly.

RFX38 02	RF38 on contactor BF09 - BF12 - BF18 - BF25		10	0.014
RFX38 03	RF38 on contactor BF26 - BF32 - BF38		10	0.014

Protection shrouds for power terminals.

11 G262	RF...95...3		10	0.003
11 G361	RF...200		6	0.026
11 G363	RF...420		6	0.046

Independent mounting.

Screw fixing or 35mm DIN rail (IEC/EN 60715) mounting.

RFX38 04	RF...38		5	0.082
11 G270	RF...95		10	0.148

Electrical reset.

11 G228	RF...9 - RF...95		5	0.072
---------	------------------	--	---	-------

Sealing device.

RFX38 01	RF...38 - RF...200 - RF...420		10	0.002
11 G233	RF...9 - RF...95		1	0.006

Electric button NO.

11 G244	RF...9 - RF...95		10	0.011
---------	------------------	--	----	-------

Marking element.

11 RB6	RF...9 - RF...95		100	0.003
--------	------------------	--	-----	-------

Set of 100 alphanumeric symbol.

3958	RF...9 - RF...95		1	0.002
------	------------------	--	---	-------

- ① Front IP20 protection is warranted to contactor-thermal relay connections.
- ② Independent mounting base for any RF95 relay.
Remove the links fixed on RF...95 and use those supplied with the base.
- ③ Replace with voltage digit.
Standard voltages are:
- AC 50/60Hz 24V / 48V / 110-125V / 220-240V / 380-415V.
- ④ Replace with the required alphanumeric symbol.
Each package contains 100 pieces of the same symbol.

Operational characteristics

ELECTRICAL RESET G228

Control circuit voltage AC (50/60Hz)	V	12 - 550
Power consumption in AC	VA	300
Minimum reset time	ms	20
Terminals	Faston	6.3x0.8

NOTE: Coils can remain supplied for a maximum interval of 500ms; 3 consecutive operations are allowed, followed by a 5 minute interval. Reset only if at least 1min has passed from overload tripping.

It is recommended to use the wiring diagram on page 3-11.

INDEPENDENT MOUNTING

– Conductor cross section with one cable:

- 6...10mm² / AWG 8 for RFX38 04
- 35mm² / AWG 2 for G270

– Tightening torque:

- 2...2.5Nm / 1.5...1.8 lbf for RFX38 04
- 3.9Nm/2.88 lbf for G270.

Certifications and compliance


Certifications obtained:

Tipo	cULus	CSA	EAC
G361	—	●	●
G363	—	●	●
G372	—	●	●
G373	—	●	●
G375	—	●	●
G376	—	●	●
G270	●	—	●
RFX38 04	●	—	●


● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices for thermal overload relays.
CSA – CSA certified for Canada only (File 54332) as Kits for industrial control equipment.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL508, CSA C22.2 n° 14.

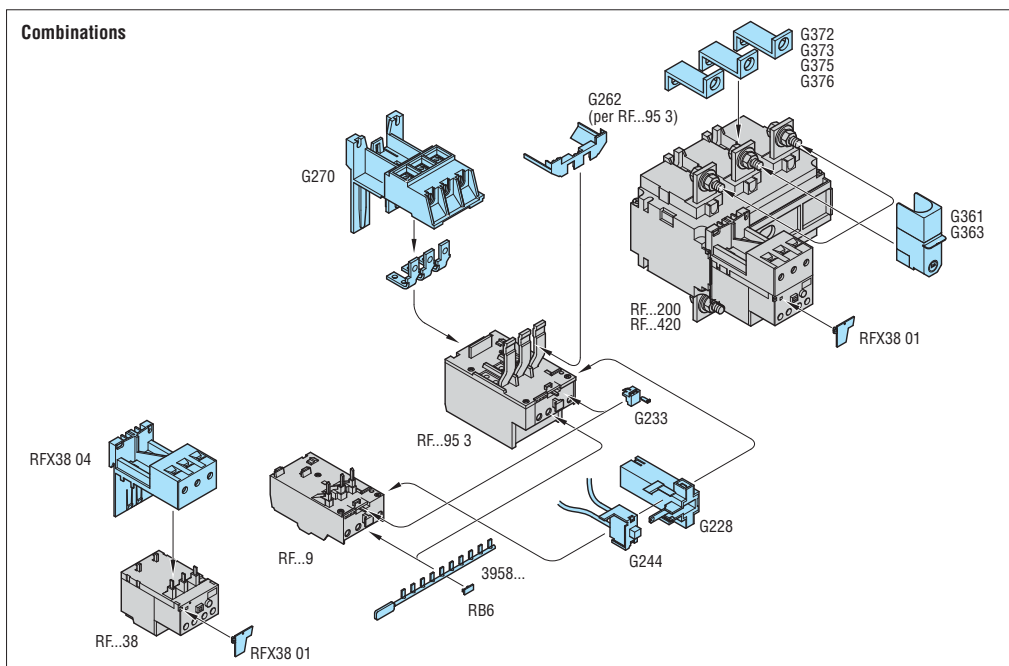

Protection cover for thermal overload relay-contactor assembly

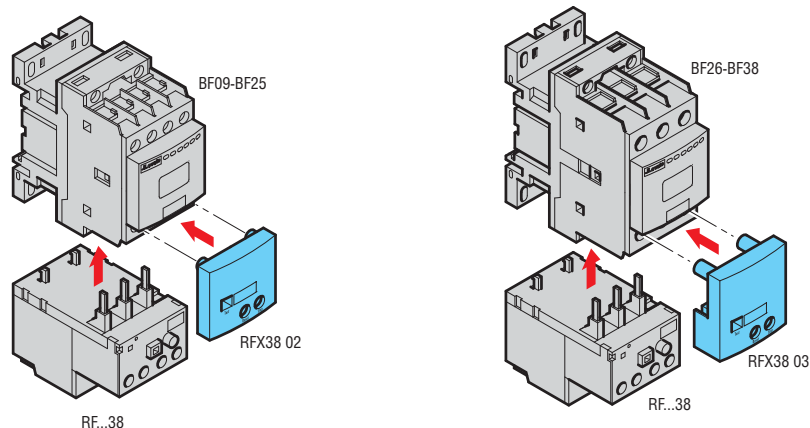

Thermistor protection relay



31 DRPT...

Order code	Rated auxiliary supply voltage	Qty per pkg	Wt.
	[V]	n°	[kg]
DC supply (version for 35 mm DIN rail IEC/EN 60715).			
31 DRPTC 24	24VDC	1	0.269
AC supply (version for 35 mm DIN rail IEC/EN 60715).			
31 DRPT 24	24VAC	1	0.269
31 DRPT 110	110VAC	1	0.269
31 DRPT 220	220-240VAC	1	0.269
ACCESSORY			
Order code	Description	Qty per pkg	Wt.
		n°	[kg]
31 CE106	Adapter for screw fixing of DRPT relay on mounting plate.	10	0.008

① Galvanic isolation between supply and measuring circuits does not exist.

General characteristics

The DRPT is a thermal protection relay for motors equipped with thermistor PTC sensors immersed in the winding heads. The maximum number of thermistors to be used is limited by the resistance of all the sensors connected in series; total ohmic value is not to exceed 1.5kΩ at 25°C.

The DRPT type has fail-safe operation: the protective feature trips even in the case the PTC circuit is disconnected or there is a lack of voltage. Resetting is manual or automatic.

Operational characteristics


- Supply circuit
 - Rated frequency: 50-60Hz for AC types only
 - Operational limits: 0.85-1.1 Us
 - Maximum dissipation: 2.5W
 - Connection: permanent.
- Measuring circuit
 - Type of connectable PTC sensor: According to DIN 44081
 - Total PTC resistance at 25°C: ≤1.5kΩ
 - Tripping resistance: 2.7-3.1kΩ
 - Resetting resistance: 1.5-1.8kΩ
 - Voltage at PTC terminals: ≤ 2.5VDC.
- Remote resetting
 - Control: NC contact opening
 - Contact voltage: 5VDC
 - Current consumption: about 1mA.
- Relay output
 - Arrangement: 1 relay with 2 changeover contacts
 - Rated operational voltage Ue: 250VAC
 - Conventional free air thermal current Ith: 5A
 - Designation to IEC/EN 60947-5-1: B300
 - Mechanical life: 50x10⁶ cycles
 - Electrical life (with rated load): 2x10⁶ cycles.
- Indications
 - Green LED indicator for power ON
 - Red LED indicator for relay state TRIP
- Connections
 - Conductor section 2x1.5mm² with ferrule (max)
 - Tightening torque: 0.8-1.2Nm.
- Ambient conditions
 - Operating temperature: -10...+60°C
 - Storage temperature: -30...+80°C.
- Housing
 - Snap on 35mm DIN rail (IEC/EN 60715)
 - For screw fixing, use CE106 adapter
 - Degree of protection
 - IP40 housing
 - IP20 terminals.

Certifications and compliance


Certifications obtained: EAC.
Compliant with standards: IEC/EN 60255-5.

3


RFX38 04 base c/w RF...38 thermal relay

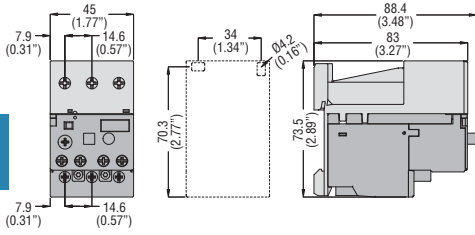


G270 base c/w RF...95 thermal relay

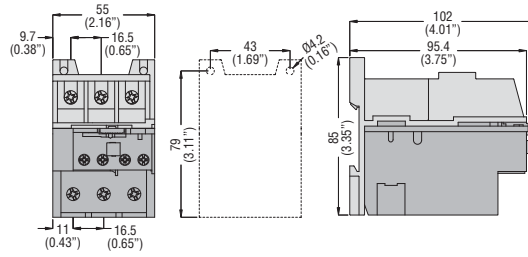

RF...200 thermal relay with links **G372** and **G373**


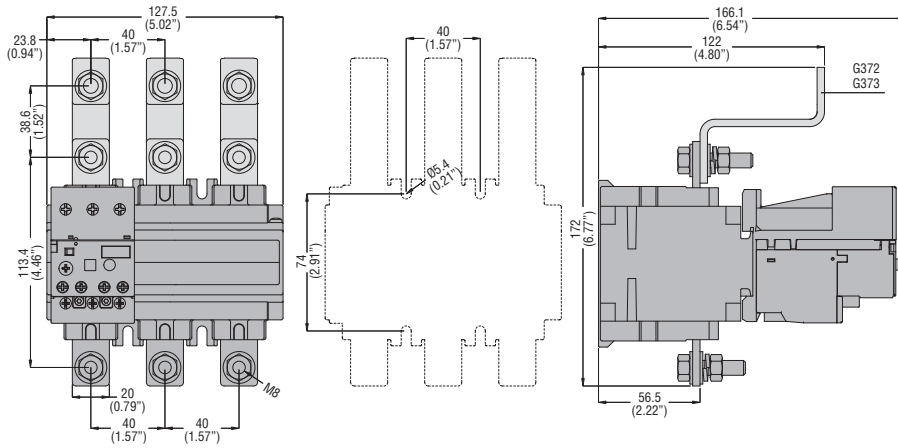


RF...420 thermal relay with links **G375** and **G376**


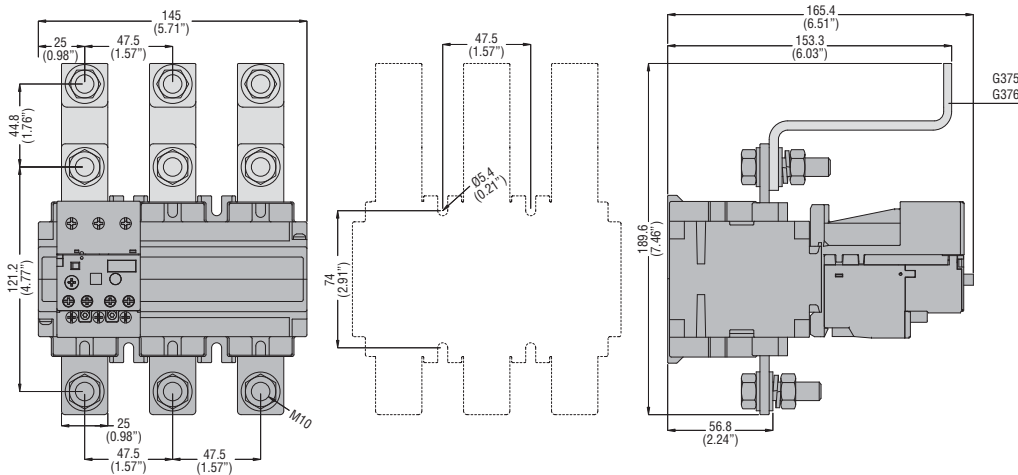


ADD-ON BLOCKS FOR THERMAL OVERLOAD RELAYS RF...9 and RF...95

G228... reset




G244 button




THERMISTOR PROTECTION RELAY


DRPT relay




CE106 adapter




THERMAL OVERLOAD RELAYS FOR BG MINI-CONTACTORS RF9 - RFN9




RFA9 - RFNA9




THERMAL OVERLOAD RELAYS FOR BF CONTACTORS RF38 - RFN38




RF95 - RFN95



RFA95 - RFNA95




THERMAL OVERLOAD RELAYS FOR B CONTACTORS RF200 - RFN200 RF420 - RFN420

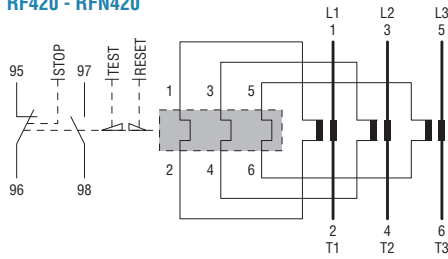



ADD-ON BLOCKS FOR THERMAL OVERLOAD RELAYS RF9 - RF95

Electric reset

G228

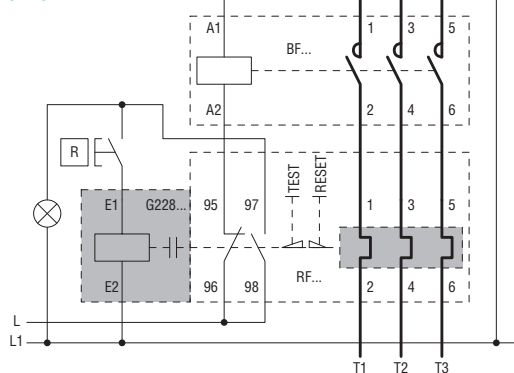

THERMISTOR PROTECTION RELAY DRPT

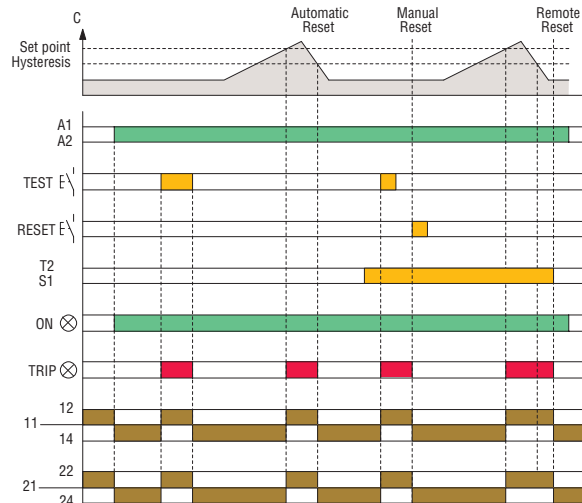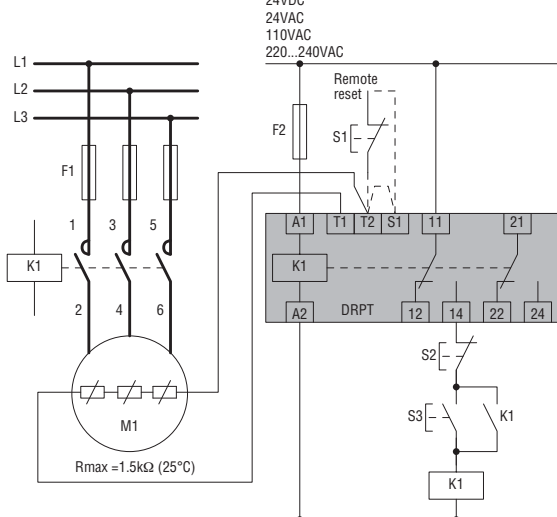

Phase failure/single phase sensitive hand reset	RF9	RF38^①	RF95	RF200^②	RF420^①
Phase failure sensitive automatic reset	RFA9	RFN38^①	RFA95	RFN200^②	RFN420^①
Non phase failure/non single phase sensitive hand reset	RFN9		RFN95		
Non phase failure/non single phase sensitive automatic reset	RFNA9		RFNA95		

POWER CIRCUIT CHARACTERISTICS

IEC rated insulation voltage Ui	V	690	690	690	1000	1000
IEC rated impulse withstand voltage Uimp	kV	8	6	8	6	6
Frequency limit	Hz	0-400	0-400	0-400	50-60	50-60
Operational range	from	A	0.09	0.1	14	60
	to	A	15	38	110	200
Tripping class		10A				
Particular characteristics		Test button - Trip indicator				
Connection		Direct			With current transformers ^③	
Terminals	Type	Screw and washer		Yoke clamp	Screw and flat washer	
	Screw	M4	M4	M5	M8	M10
	Terminal width	mm	9.8	12.6	9	20
Phillips	n°	2	2	2	13mm ^④	18mm ^④
	Nm	2.3	2...2.5	3.9	18	35
Tightening torque for power terminals	lbft	1.7	1.5...1.8	2.88	13.3	25.9
	Maximum conductor section connectable					
AWG	N°	10	8	2	-	-
Flexible w/o lug	mm²	6	10	35	-	-
Flexible c/w lug	mm²	10	6	-	150	2 x 150
Bar	mm	-	-	-	25 x 3	30 x 5
Dissipation per phase	W	0.7-2.4	0.7-2.4	2.0-4.2	0.7-2.4	0.7-2.4

AUXILIARY CIRCUIT CHARACTERISTICS

Available contacts	NO	n°	1			
	NC	n°	1			
IEC rated insulation voltage	V	690				
IEC conventional free air thermal current Ith	A	10				
Terminals with screw and washer	Screw	M3.5				
	Terminal width	mm	8			
	Phillips	n°	1	2	1	2
Maximum conductor section connectable	Flexible w/o lug	mm²	2.5			
	Flexible c/w lug	mm²	2.5			
Tightening torque for auxiliary terminals	Nm	1	0.8...1	1	0.8...1	0.8...1
	lbft	0.74	0.59...0.74	0.74	0.59...0.74	0.59...0.74
UL/CSA and IEC/EN 60947-5-1 designation		B600 - P600 ^⑤	B600-R300	B600-P600 ^⑤	B600-R300	B600-R300

AMBIENT CONDITIONS

Operating temperature ^①	°C	-20...+55	-25...+60	-20...+55	-25...+60	-25...+60
Storage temperature	°C	-55...+70	-50...+70	-55...+70	-50...+70	-50...+70
Compensation temperature	°C	-15...+55	-20...+60	-15...+55	-20...+60	-20...+60
Maximum altitude	m	3000				
Operation position	Normal	On vertical plane				
	Allowable	±30°				
Mounting		On contactor or separately				

^① With manual and automatic resetting.

^② For currents higher than 420A, consult Customer Service for information; see contact details on inside front cover.


^③ Standard supplied.

^④ Metric wrench/spanner.




^⑤ C600-R300 for automatic reset type.

TRIP CHARACTERISTIC FOR RF THERMAL OVERLOAD RELAYS (AVERAGE TIME)

Three-phase balanced operation

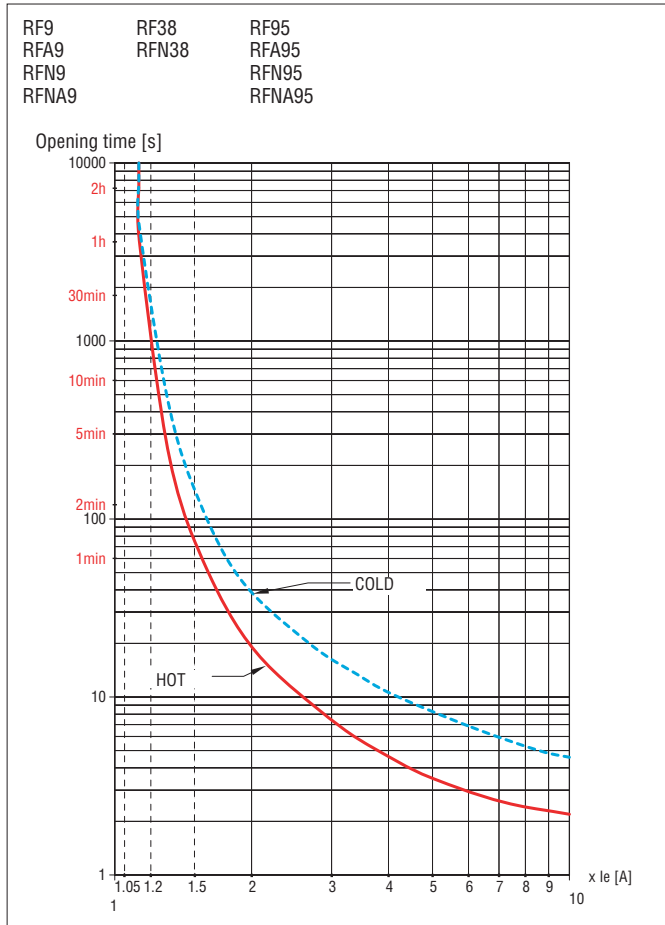

Two-phase operation (phase failure/single phase)

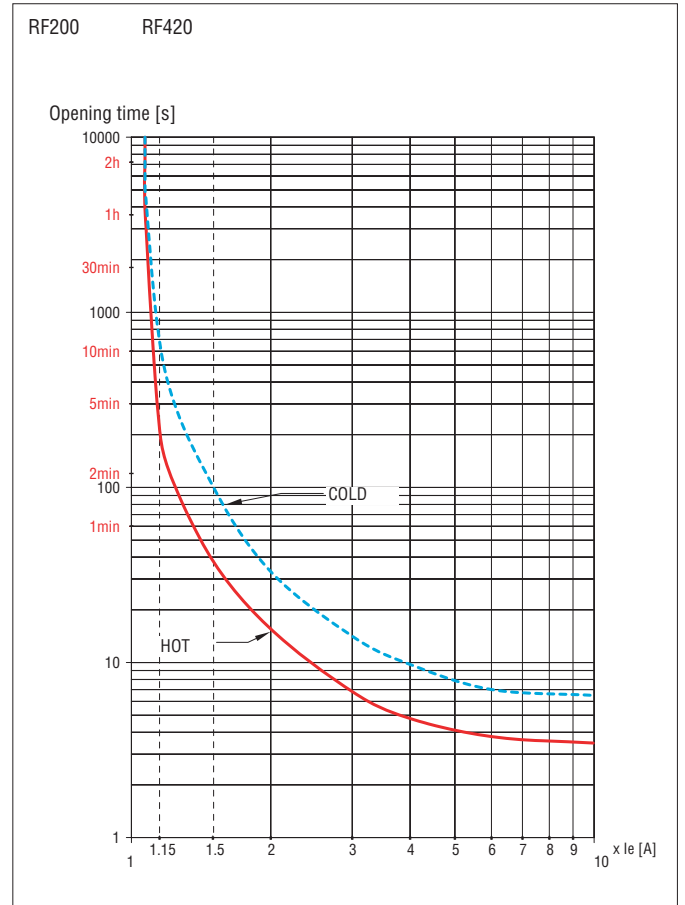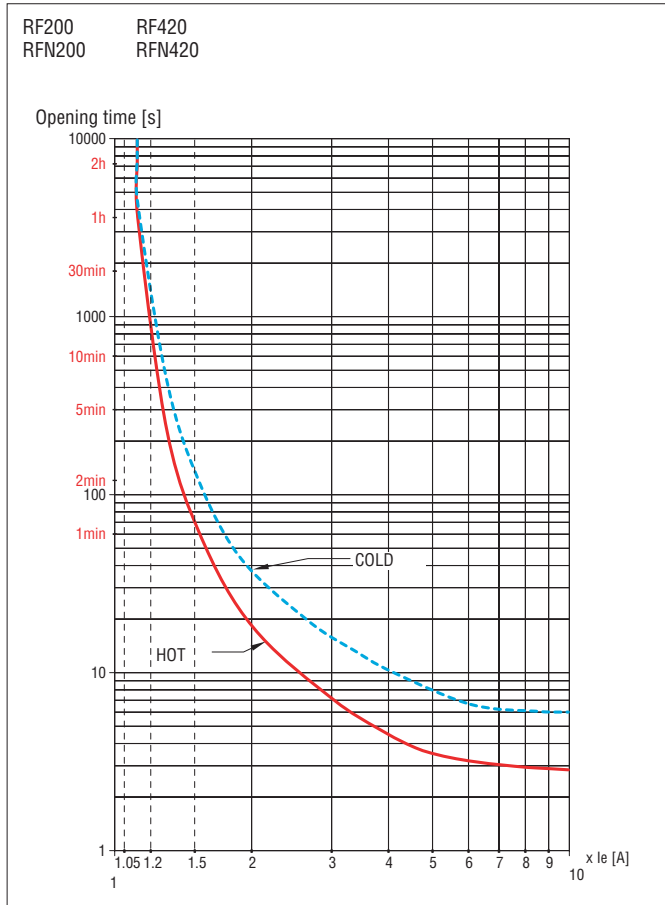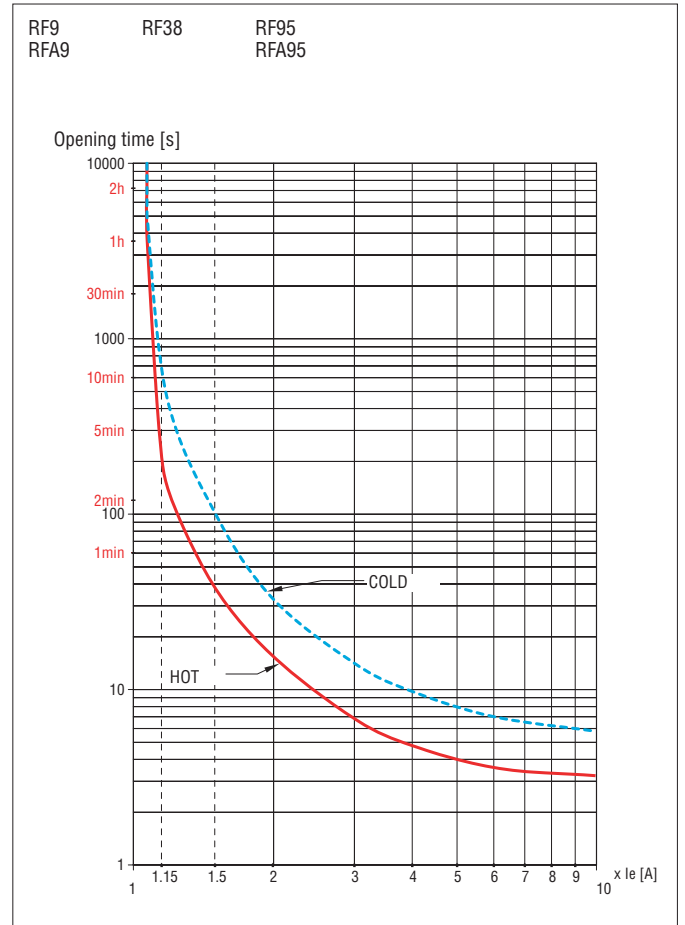

Tripping times can have a $\pm 20\%$ deviation with respect to the average tripping curve values above.