

# EM511

## Energy analyzer for 1-phase systems



### Description

EM511 is an energy analyser for 1-phase systems up to 240 V L-N and current up to 45 A. In addition to a digital input, the unit can be equipped, according to the model, with a static output (pulse or alarm), a Modbus RTU communication port or an M-Bus communication port.

### Benefits

- **Enhanced readability.** The backlit display ensures perfect visibility even in low light. The different size of the digits preceding and following the dot makes the displayed values easier to read, while the essential style of the units of measure allows you to readily understand the available variables.
- **Easy browsing.** Page configuration and browsing are very intuitive, thanks to the user interface with 2 mechanical keys. The slideshow function automatically displays the desired measurements in sequence, without having to use the keyboard; the page filter allows you to hide unnecessary information.
- **Quick configuration.** The configuration wizard which runs when the system is started up for the first time allows you to commission the unit without errors in a matter of seconds. The UCS configuration software is available for download free of charge.

### Applications

EM511 can be installed in any low-voltage switchboard with rated current up to 45 A, thanks to the 10 mm<sup>2</sup>/8 AWG screw terminals, to monitor the energy consumption, the main electrical variables and the harmonic distortion.

If used to monitor a single machine or a specific load, it provides all the main electrical variables to identify any possible malfunction in its early stage and can correlate the energy consumption with the hours of operation, to plan maintenance and prevent failures. The partial meter reset function, easily implementable by means of a digital input, allows you to monitor each individual machine cycle.

Thanks to the fast communication refresh time and the high resolution of the variables, EM511 can also be used as a data source for control actions, such as avoiding feeding energy into the electricity grid in a photovoltaic joint installation with energy storage.

## ► Main functions



- Measure active, reactive and apparent energy
- Measure the main electrical variables
- Measure the load run hours of the analyser
- Measure the total harmonic distortion (THD) of current and voltages
- Transmit data to other systems through Modbus RTU or M-Bus
- Manage a digital output for pulses or alarm transmission
- Visualize the measured variables on the display

## ► Main features


- Real time variables (V L-N, A, W/var, VA, PF, Hz)
- Displaying the consumed active energy with a resolution of 0.001 kWh
- The frequency value is available via Modbus, with a resolution of 0.001 Hz
- Average value calculation (dmd) for current and power (kW / kVA)
- Modbus RTU RS485 or M-Bus communication (data refresh every 100 ms)
- Continuous sampling of voltage and current
- Backlit LCD display
- cULus approved (UL 61010)

## UCS software

- Free download from Carlo Gavazzi website
- Configuration through RS485 from PC or through UWP3.0 via LAN or the web (UWP Secure Bridge function)
- Setups can be saved offline for serial programming with a single command
- Real time data view for testing and diagnostics

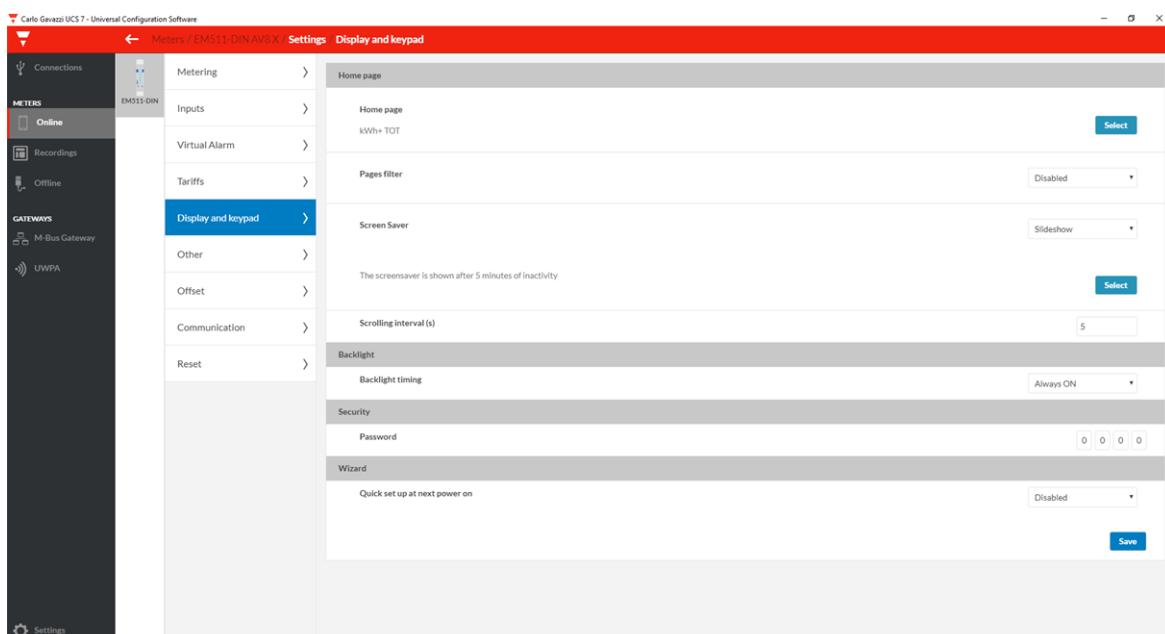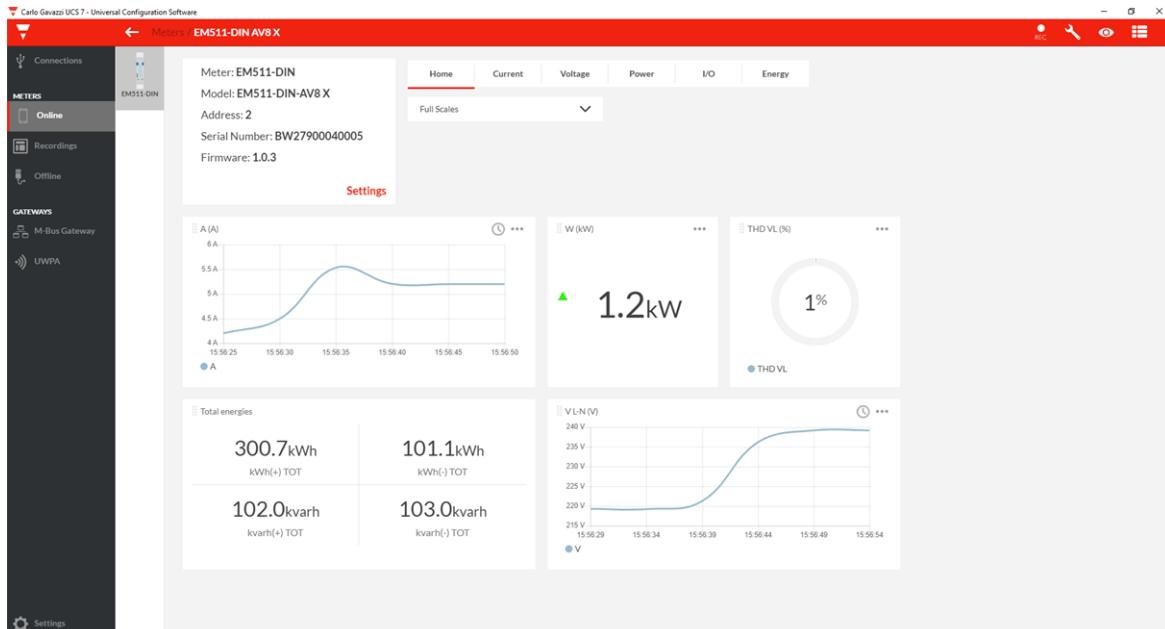

## Structure

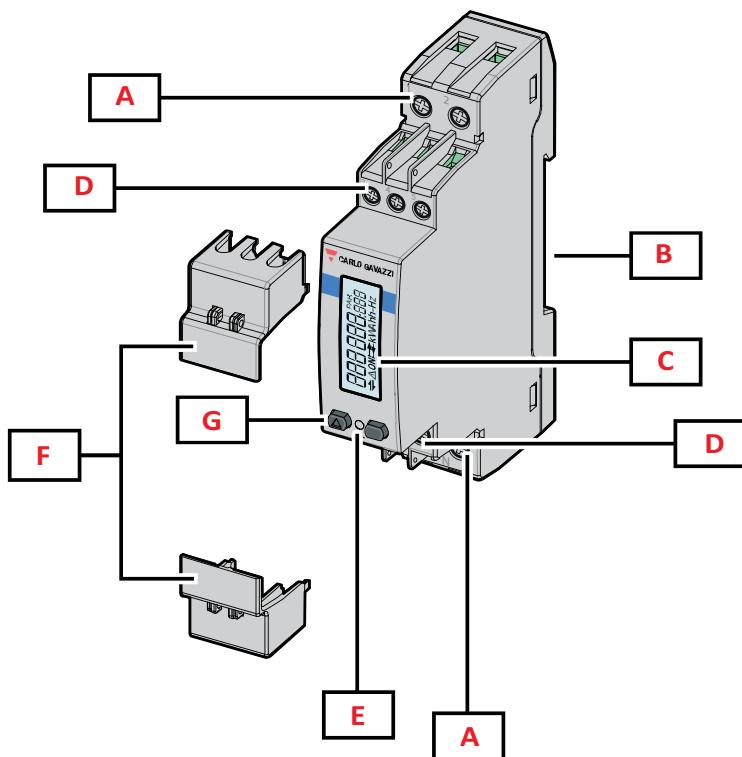


*Fig. 1 Front*

Area	Description
<b>A</b>	Voltage inputs/Current inputs
<b>B</b>	DIN - rail mounting bracket
<b>C</b>	Display
<b>D</b>	Digital input, digital output and communication connections
<b>E</b>	LED
<b>F</b>	Sealable covers
<b>G</b>	Browsing and configuration buttons

## Features

### ► General

<b>Material</b>	Housing: PBT Transparent cover: polycarbonate
<b>UL flammability class</b>	Housing: V-0 Transparent cover: V-2
<b>Protection degree</b>	Front: IP40 Terminals: IP20
<b>Terminals</b>	Measurement inputs: 2.5 to 10 mm <sup>2</sup> /8 to 14 AWG, 1.1 Nm/9.74 lb-in Inputs, outputs and communication: min: 0.2 to 2.5 mm <sup>2</sup> /14 to 24 AWG, 0.4 to 0.8 Nm/3.54 to 7.08 lb-in
<b>Oversupply category</b>	Cat. III
<b>Pollution degree</b>	2
<b>Mounting</b>	DIN rail
<b>Weight</b>	155 g/0.34 lb(packaging included)

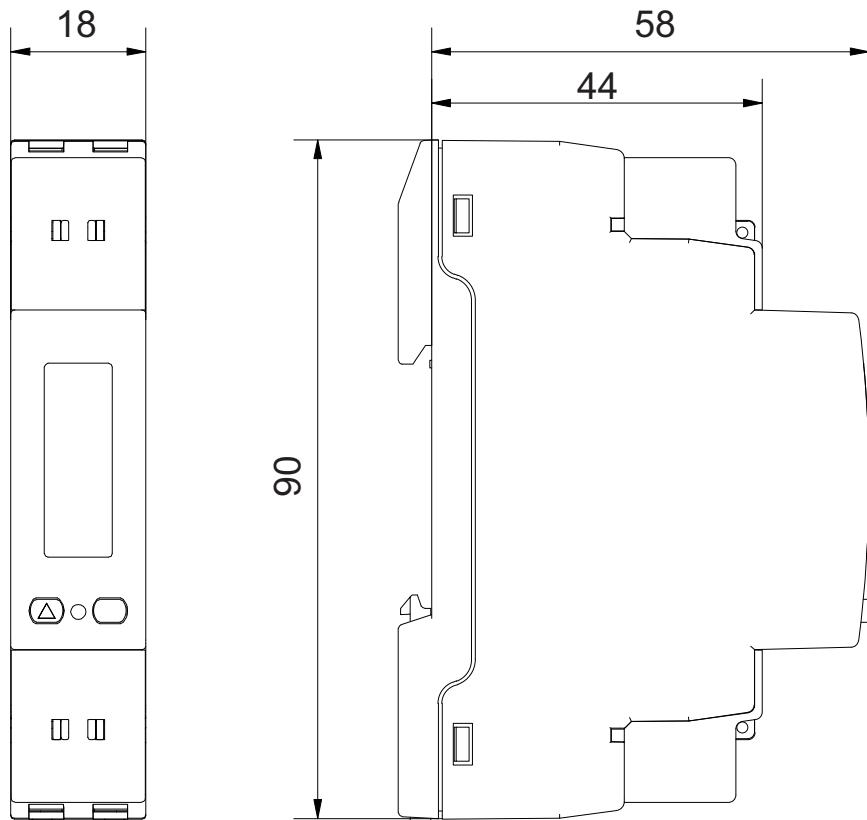

**Fig. 2**

## ► Environmental specifications

<b>Operating temperature</b>	From -25 to +55 °C/from -13 to +131 °F
<b>Storage temperature</b>	From -25 to +70 °C/from -13 to +158 °F
<b>Electromechanical environmental condition</b>	E2
<b>Mechanical environmental condition</b>	M2

**Note:** R.H. < 90 % non-condensing @ 40 °C / 104 °F.

## ► Input and output insulation

Type	Measurement inputs	Digital input	Digital outputs	RS485 serial port	M-Bus serial port
<b>Measurement inputs</b>	-	Double/Reinforced	Double/Reinforced	Double/Reinforced	Double/Reinforced
<b>Digital input</b>	Double/Reinforced	-	none	none	none
<b>Digital outputs</b>	Double/Reinforced	none	-	-	-
<b>RS485 serial port</b>	Double/Reinforced	none	-	-	-
<b>M-Bus serial port</b>	Double/Reinforced	none	-	-	-

According to: EN 61010-1. Overvoltage category III. Pollution degree 2.

## ► Compatibility and conformity

<b>Directives</b>	2014/35/EU (LVT - Low Voltage) 2014/30/EU (EMC - Electro Magnetic Compatibility) 2011/65/EU (Electric-electronic equipment hazardous substances)
<b>Standards</b>	Electromagnetic compatibility (EMC) - emissions and immunity: EN 62052-11 Electrical safety: EN 61010-1 Metrology: EN62053-21, EN62053-23 Pulse output: IEC 62053-31
<b>Approvals</b>	  

## ► Electrical specifications

<b>Electrical system</b>	
<b>Managed electrical system</b>	Single-phase

<b>Voltage inputs</b>	
<b>Voltage connection</b>	Direct
<b>Rated voltage L-N (from Un min to Un max)</b>	120 to 240 V
<b>Voltage tolerance</b>	From 0.8 to 1.15 Un
<b>Input impedance</b>	Refer to "Power supply"
<b>Frequency</b>	50/60 Hz

<b>Current inputs</b>	
<b>Current connection</b>	Direct
<b>Base current (Ib)</b>	5 A
<b>Minimum current (Imin)</b>	0.25 A
<b>Maximum current (Imax)</b>	45 A
<b>Start-up current (Ist)</b>	0.02 A
<b>Overload</b>	For 10 ms: 30 Imax (1350 A)
<b>Input impedance</b>	<1.4 VA
<b>Crest factor</b>	2.5

## ► Power supply

<b>Type</b>	Self power supply
<b>Consumption</b>	< 0.6 W/1.8 VA

## ► Measurements

<b>Method</b>	TRMS measurements of distorted waveforms
<b>Sampling</b>	1600 samples/s @50 Hz 1920 samples/s @60 Hz

 Available measurements

Active energy	Unit
Imported (+) Total	kWh+
Imported (+) partial	kWh+
Exported (-) Total	kWh-
Exported (-) partial	kWh-
Imported (+) tariff 1	kWh+
Imported (+) tariff 2	kWh+

Reactive energy	Unit
Imported (+) Total	kvarh+
Imported (+) partial	kvarh+
Exported (-) Total	kvarh-
Exported (-) partial	kvarh-

Apparent energy	Unit
Total	kVAh
Partial	kVAh

Run hour meter	Unit
Total (kWh+)	hh:mm
Partial (kWh+)	hh:mm
Total (kWh-)	hh:mm -
Partial (kWh-)	hh:mm -
Total ON time	hh:mm

Electrical variable	Unit
Voltage L-N	V
Current	A
DMD	A
DMD MAX	A
Active power	kW
DMD	kW
DMD MAX	kW
Apparent power	kVA
DMD	kVA
DMD MAX	kVA
Reactive power	kvar
Power factor	PF

Electrical variable	Unit
Frequency	Hz
THD Current*	%
THD Voltage*	%

\* Up to 15<sup>th</sup> harmonic

## Energy metering

Energy metering depends on the measurement type you choose.

### A measurement

Easy connection function: irrespective of the current direction, the power always has a plus sign and contributes to increase the positive energy meter. The negative energy meter is not available.

### B measurement

Bidirectional: according to the power sign, the positive or the negative energy meter increases.

## Measurement accuracy

Current	
From 0.5 A to 45 A	± 0.5% rdg
From 0.25 A to 0.5 A	± 1% rdg

Voltage	
From 0.8 Un min to 1.15 Un max	± 0.5% rdg

Active and apparent power	
From 0.5 A to 45 A (PF=0.5L, 1, 0.8C)	± 1% rdg
From 0.25 A to 0.5 A (PF=1)	± 1.5% rdg

Reactive power	
From 1 A to 45.0 A (sinφ=0.5L, 0.5C)	± 2% rdg
From 0.5 A to 45 A (sinφ=1)	
From 0.5 A to 1.0 A (sinφ=0.5L, 0.5C)	± 2.5% rdg
From 0.25 A to 0.5 A (PF=1)	

**Energy**

<b>Active energy</b>	Class 1 (EN62053-21)
<b>Reactive energy</b>	Class 2 (EN62053-23)

**Frequency**

From 45 to 65 Hz	± 0.1% rdg
------------------	------------

 **Measurement resolution**

Variable	Display resolution	Resolution by serial communication
<b>Energy</b>	0.001 kWh/kvarh/kVAh	
<b>Power</b>	0.001 kW/kvar/kVA	0.1 W/var/VA
<b>Current</b>		0.001 A
<b>Voltage</b>		0.1 V
<b>Frequency</b>		0.001 Hz
<b>THD</b>		0.01 %
<b>Power factor</b>	0.01	0.001
<b>Hour meter</b>		1 min

 **Display**

<b>Type</b>	Segments
<b>Refresh time</b>	500 ms
<b>Description</b>	Backlit LCD
<b>Variable readout</b>	Instantaneous: 5+1 dgt, 5+2 dgt or 5+3 dgt Power factor: 1+3 dgt Energy: 6+3 dgt

 **LED**

<b>Front</b>	Red. Pulse weight: proportional to energy consumption: 0.001 kWh per pulse
--------------	--

## Digital outputs/inputs

### Digital inputs

<b>Connection type</b>	Screw terminals
<b>Number of inputs</b>	1
<b>Type</b>	Free contact
<b>Function</b>	Remote status Tariff management Partial meter start/pause Partial meter reset
<b>Features</b>	Open contact voltage: 5 Vdc +/- 5% Closed contact current: 5 mA max Input impedance: 11.6 kΩ Open contact resistance: ≥ 25 kΩ Closed contact resistance: ≤ 840 Ω Maximum voltage applicable with no damages: 30 V ac
<b>Configuration parameters</b>	Input function
<b>Configuration mode</b>	Via keypad or UCS software

### Digital output (O1 version)

<b>Connection type</b>	Screw terminals
<b>Maximum number of outputs</b>	1
<b>Type</b>	Opto-Mosfet
<b>Function</b>	Pulse output or alarm output
<b>Features</b>	$V_{ON}$ 2.5 V ac/dc, max 100 mA $V_{OFF}$ 42 V ac/dc
<b>Configuration parameters</b>	Output function (pulse/alarm) Pulse weight (from 0.001 to 10 kWh per pulse) Pulse duration (30 or 100 ms) Output normal status (NO or NC)
<b>Configuration mode</b>	Via keypad



## Communication ports


### ► Modbus RTU (S1 version)

<b>Protocol</b>	Modbus RTU
<b>Devices on the same bus</b>	Max 247 (1/8 unit load)
<b>Communication type</b>	Multidrop, bidirectional
<b>Connection type</b>	2 wires
<b>Configuration parameters</b>	Modbus address (from 1 to 247) Baud rate (9.6 / 19.2 / 38.4 / 115.2 kbps) Parity (None/ Even)
<b>Refresh time</b>	≤ 100 ms
<b>Configuration mode</b>	Via keypad or UCS software


### ► M-Bus (M1 version)

<b>Protocol</b>	M-Bus according to EN13757-3:2013
<b>Unit loads</b>	1.5
<b>Connection type</b>	2 wires
<b>Configuration parameters</b>	Primary address (1 to 250) Baud rate (0.3/ 2.4 / 9.6 kbps)
<b>Refresh time</b>	≤ 100 ms
<b>Configuration mode</b>	Via keypad

## Connection Diagrams

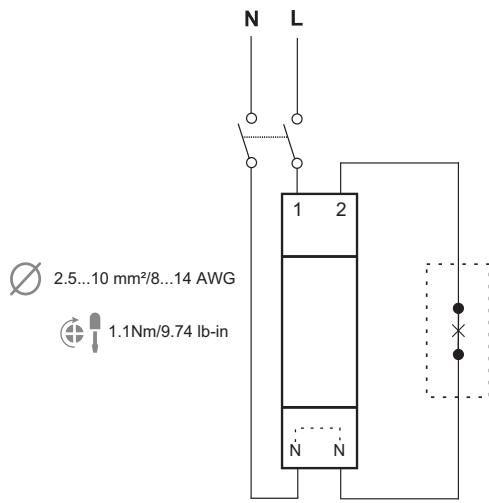


**Fig. 3** Single-phase system (solution A)

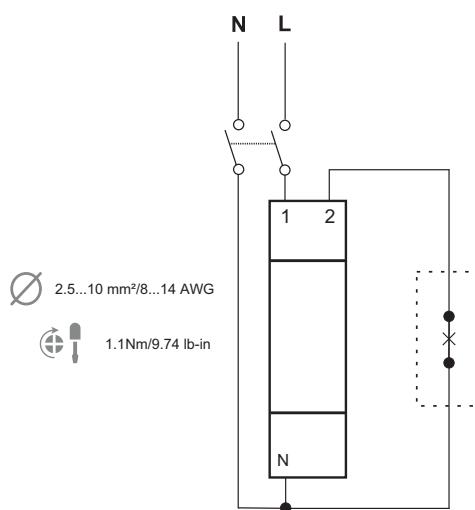


**Fig. 4** Single-phase system (solution B)

### Digital outputs/inputs




**Fig. 5** Digital input




**Fig. 6** Digital output


## Communication

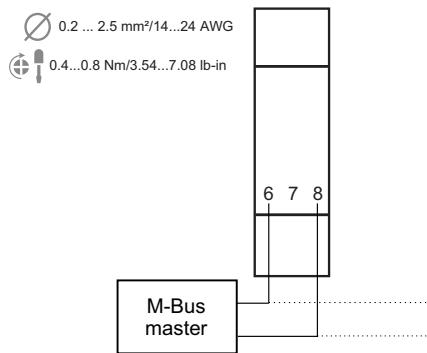

**Fig. 7** M-Bus



**Fig. 8** RS485 port

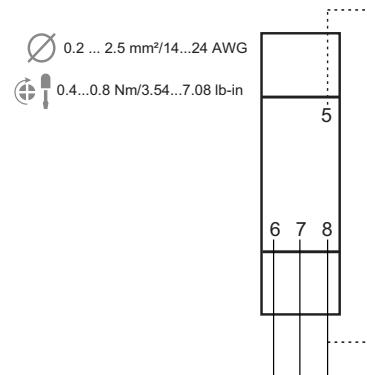

**Fig. 9** Last device on RS485

## References



Order code



**EM511 DIN AV8 1X  X**

Enter the code option instead of

Code	Options	Description
<b>EM511 DIN AV8 1X</b>	-	-
<input type="checkbox"/>	O1	Digital output
	S1	RS485 Modbus RTU
	M1	M-Bus
X		Non MID models, cULus approval



COPYRIGHT ©2023

Content subject to change. Download the PDF: [www.gavazziautomation.com](http://www.gavazziautomation.com)