## **HYDRAULIC CUTTING TOOL**

## general features



| STORAGE |               |              |                        |                     |  |  |  |  |
|---------|---------------|--------------|------------------------|---------------------|--|--|--|--|
| Туре    | Dimensions mm | Weight<br>kg | Supplied with the tool | Purchase separately |  |  |  |  |
| VAL P7  | 727x202xh115  | 1,3          | *                      | _                   |  |  |  |  |

Hand operated hydraulic tool specifically designed to cut Copper, aldrey, Aluminium, Aluminium-Steel cables and Steel ropes, Aluminium and Steel rods having a max overall diameter of 55 mm.

OVERHEAD LINE APPLICATION

The HT-TCO55 is provided with a two stage hydraulic system, which advances the blades quickly to the cable. This proven system saves operator time and effort.


The HT-TCO55 is provided with an automatic safety valve to bypass oil when reaching max pressure.

This means safety to the operator and protection to the blades.

The blades are manufactured from high strength special Steel, heat treated to ensure a long service life. The shape of the blades provides a "clean" cut.

**OVERHEAD LINE APPLICATION** 

The head can be opened to allow cutting of running cables and ropes. The head rotates 330 degrees allowing the operator to perform the cut in the most comfortable position. The tool is supplied complete with plastic case VAL P7 for protection and storage when not in use.

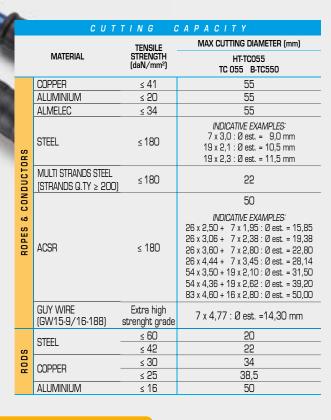

## **HYDRAULIC CUTTING HEAD**

general features



|   | Max<br>cutting Ø | Max operating<br>pressure –<br>bar | Dimensions mm |       | Weight |
|---|------------------|------------------------------------|---------------|-------|--------|
|   | mm               |                                    | length        | width | kg     |
| Ī | 55               | 700                                | 357           | 134   | 6,6    |
|   |                  |                                    |               |       |        |

| STORAGE   |               |              |                           |                     |  |  |  |
|-----------|---------------|--------------|---------------------------|---------------------|--|--|--|
| Туре      | Dimensions mm | Weight<br>kg | Supplied<br>with the tool | Purchase separately |  |  |  |
| VAL TCO55 | 384x231x145   | 3,7          | *                         | _                   |  |  |  |

Hydraulic cutting head complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max, (see page 178-184)

TCO55 has the same cutting capability as HT-TCO55.

