


PIXSYS
electronics

www.pixsys.net ☎ +39 041 5190518 R.A.

CODE : **2000.90.233**

PT1000B-5x20-COST-0000-2,0GTP

DESCRIPTION :
PT1000B sensor 5x20 mm, Moulded
no process connection with 2m thermoplastic rubber cable.

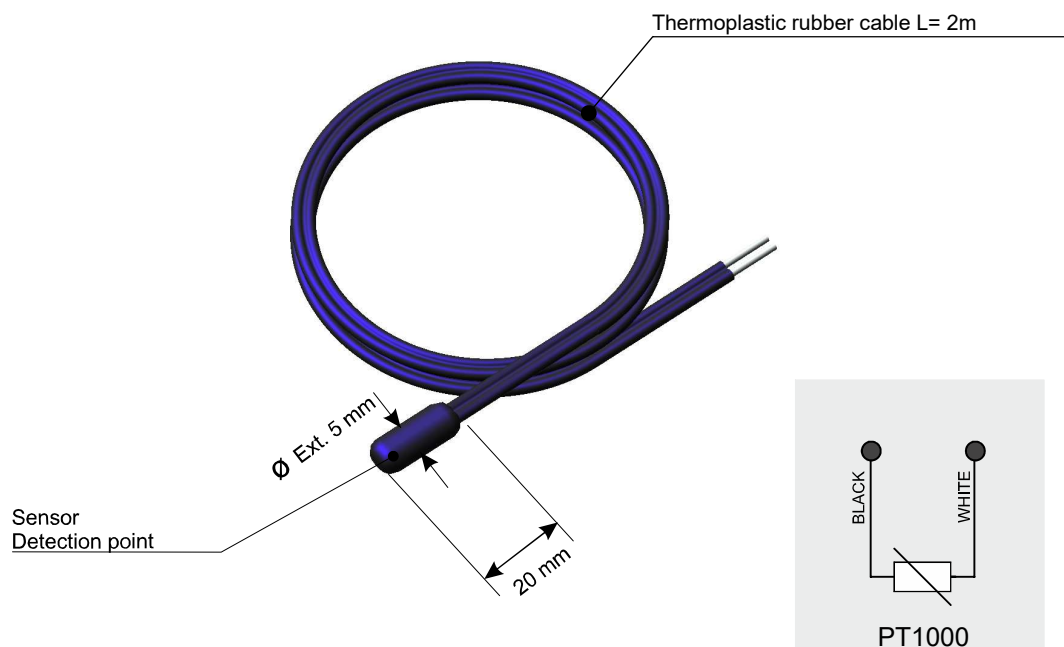

OPERATING TEMPERATURE :	-50°C + 110°C
SENSOR :	PT1000B 0,12% 1000 Ohm at 0°C (-50°C ...+500°C)
IMMERSION MATERIAL :	Thermoplastic rubber
RESPONSE TIME :	15 sec.
SENSOR INSULATION :	Not available
ACCURACY :	According to IEC 751
CERTIFICATION :	NO
CABLE MATERIAL :	GTP Bleu thermoplastic rubber
SEALING :	IP68

CONNECTION CABLE FEATURES					
SHEATH MATERIAL	TEMPERATURE [°C]		ABRASION RESISTANCE	HUMIDITY RESISTANCE	FLAME BEHAVIOUR
	EXERCISE	INSTANTANEOUS			
PVC	-30 / + 105	+ 105	Good	Good	Self-extinguish
GSC Silicon rubber	-40 / + 250	+ 250	Sufficient	Fair	Self-extinguish
TFE Teflon	-200 / + 260	+ 310	Excellent	Excellent	Self-extinguish
KAP Kapton	-200 / + 400	+ 440	Fair	Good	Self-extinguish
TTS Glass fiber	-200 / + 500	+ 500	Poor	Poor	incombustible
TTC Ceramic fiber	+ 1000	+ 1100	Poor	Poor	incombustible

EASYUP CONFIGURATION


To simplify installation start-up, "EasyUp" mode allows to select type of sensor and to fix its measuring range on the controller by entering a password (see table below).

EASYUP CODE FOR THIS SENSOR :

2250


SENSOR SELECTION :	PT1000
LOWER LIMIT :	-50°C
UPPER LIMIT :	+110°C

ATR142 CONNECTION

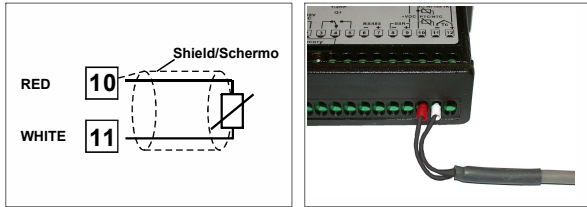


N.B. EasyUp on software version 1.12 or greater

ATR401 CONNECTION

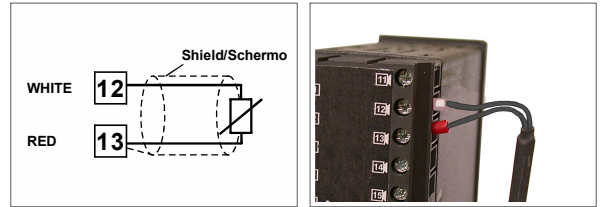


N.B. EasyUp on software version 1.01 or greater

ATR236 /243 CONNECTION

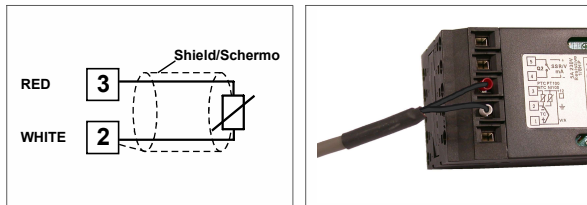


N.B. EasyUp on software version 1.18 or greater

DDR245 CONNECTION

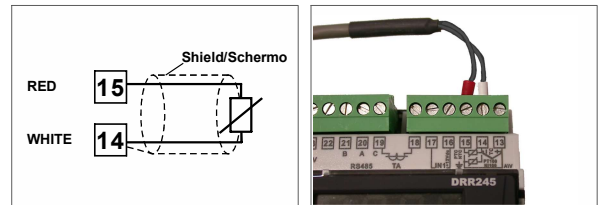

N.B. EasyUp on software version 1.18 or greater

ATR621 / 171 CONNECTION

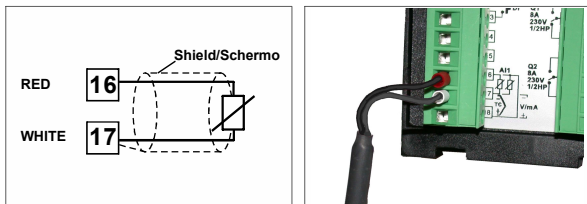

N.B. EasyUp on software version 1.01 or greater