


HIGH VOLTAGE TERMINALS

two hole fixing


CA-2M 2A-2M

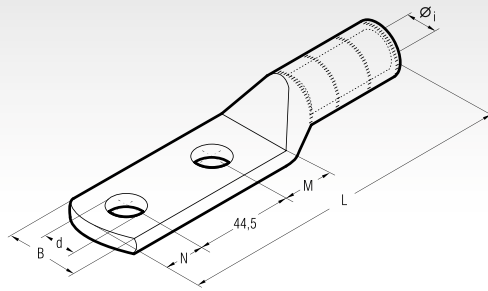

Conductor Size sqmm	Ø Stud mm	Type	Dimensions mm						Quantity Box/Bag	Hydraulic Tools
			Øi	B	M	N	L	d		
25 R	8	CA25-2M8	6,8	14,0	10,0	11,0	113,5	8,4	200/50	HT51 RH50 B500 RHU81 HT81-U RHU81 ECW-H3D RHU520 HT120 and tools and heads with 130 kN crimping force
	12	CA25-2M12	6,8	21,0	16,0	14,0	122,5	13,2	150/50	
30 RC/S ÷ 40 S	12	CA40S-2M12	8,2	21,5	16,0	14,0	123,5	13,2	100/50	
50 RC	12	CA50R-2M12	8,7	20,5	16,0	14,0	123,5	13,2	100/50	
50 S	12	CA50S-2M12	9,5	21,0	16,0	14,0	123,5	13,2	100/50	
63 S ÷ 70 S	12	CA70S-2M12	11,0	27,0	16,0	14,0	127,7	13,2	50/25	
80 S ÷ 95 RC	14	CA95R-2M14	12,0	28,0	18,0	16,0	139,5	15,0	30/15	
95 S ÷ 100 S	14	CA95S-2M14	13,5	29,0	18,0	16,0	139,5	15,0	30/15	
120 RC/S ÷ 150 RC	14	CA150R-2M14	15,0	31,0	18,0	16,0	145,5	15,0	30/15	
150 S ÷ 160 RC	14	CA150S-2M14	16,5	32,0	18,0	16,0	145,5	15,0	30/15	
160 S ÷ 200 RC	14	CA200R-2M14	17,0	32,5	18,0	16,0	145,0	15,0	30/15	
200 S ÷ 240 RC	14	CA240R-2M14	19,2	43,0	18,0	16,0	151,5	15,0	15/5	
240 S ÷ 315 RC	14	CA315R-2M14	21,5	43,0	18,0	16,0	149,5	15,0	20/5	
315 S	14	CA315S-2M14	23,7	44,0	18,0	16,0	149,5	15,0	20/5	
400 R	12	2A80-2M12*	27,0	51,0	20,0	14,0	177,5	13,2	15/5	
	14	2A80-2M14*	27,0	51,0	22,0	16,0	181,5	15,0	15/5	
	16	2A80-2M16*	27,0	51,0	22,0	19,0	184,5	17,0	15/5	
500 R	14	2A100-2M14	30,3	56,5	22,0	16,0	182,5	15,0	10/5	
	16	2A100-2M16	30,3	56,5	22,0	19,0	185,5	17,0	10/5	
600 R ÷ 630 R	14	2A120-2M14	33,4	61,5	22,0	16,0	200,5	15,0	15/5	
	16	2A120-2M16	33,4	61,5	22,0	19,0	202,5	17,0	15/5	

*UL marking

R = Round conductors RC = Round Compact conductors S = Sector shaped conductors




CA-2M and 2A-2M Copper Tube Terminal Lugs are designed for high voltage applications up to 33kV. Manufactured from high purity Copper tube, annealed and Tin plated. The extended barrel enhances electrical and mechanical performance. The absence of an inspection hole prevents moisture entry into the crimped joint. Featuring an extended palm with two fixing holes at 44.5 mm centres. Details of the appropriate crimping tools and dies are shown on page 234.

HIGH VOLTAGE TERMINALS

palm bent at 55° - two hole fixing

2A-2M/55°

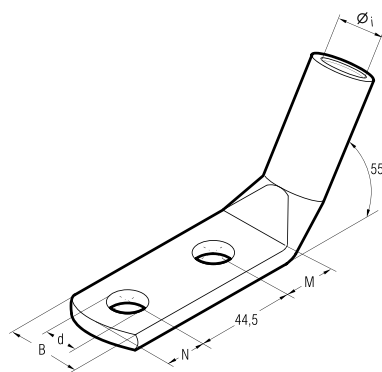

Conductor Size sqmm	Ø Stud mm	Type	Dimensions mm						Quantity Box/Bag	Hydraulic Tools
			Øi	B	M	N	d			
400 R	14	2A80-2M14/55°	27,0	51,0	22	16	15	10/5	HT120 and tools and heads with 130 kN crimping force ECW-H3D RHU520	
600 R ÷ 630 R	14	2A120-2M14/55°	33,4	61,5	22	16	15	15/3		

R = Round conductors



The 2A-2M/55° Copper Tube Terminal Lugs have the same characteristics as the CA-2M and 2A-2M ranges, with the additional feature of the palm bent at 55°. Details of the appropriate crimping tools and dies are shown on page 234.