


CAA-M




The barrels of series CAA-M connectors are made from Aluminium of a purity equal to or greater than 99,5%. The barrel is friction welded to the palm thus achieving the best possible transition between the Copper palm and Aluminium barrel. Barrels are capped and filled with grease so as to avoid oxidation of the Aluminium.

Details of the appropriate crimping tools and dies are shown on pages 235, 237.

BIMETALLIC CONNECTORS


Copper palm fixing - Aluminium barrels

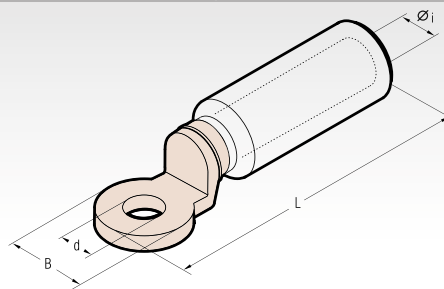

Conductor Size sqmm	Ø Stud mm	Type	Dimensions mm				Quantity Box/Bag	Hydraulic Tools			
			Øi	B	L	d					
10	12	CAA10-M12	4,3	24,0	87,0	13,0	90/3	HT131-UC RHU31-C B1300-UC			
16	12	CAA16-M12	5,5	24,0	87,0	13,0	90/3				
25	12	CAA25-M12	6,5	24,0	87,0	13,0	90/3				
35	12	CAA35-M12	8,0	24,0	87,0	13,0	90/3				
	12	CAA35-20-M12	8,0	24,0	87,0	13,0	60/3				
50	12	CAA50-M12	9,0	24,0	87,0	13,0	60/3				
70	12	CAA70-M12	11,0	24,0	87,0	13,0	60/3				
95	12	CAA95-M12	12,5	24,0	87,0	13,0	60/3				
120	12	CAA120-M12	13,7	31,0	111,0	13,0	30/3				
150	12	CAA150-M12	15,5	31,0	111,0	13,0	30/3				
185	12	CAA185-M12	17,0	35,0	116,0	13,0	18/3				
240	12	CAA240-M12	19,5	35,0	116,0	13,0	18/3				
300	12	CAA300-34M12	22,5	35,0	120,0	13,0	15/3	HT120 HT131-C RHC131 ECW-H3D RHU230-630			
	16	CAA300-34M16	22,5	35,0	120,0	17,0	15/3				
400	16	CAA300-M16	23,3	35,0	152,5	16,5	12/3				
	16	CAA400-M16	26,0	35,0	152,5	16,5	12/3				
500	16	CAA500-M16TNBD	29,1	35,0	152,5	16,5	12/3				
630	8	CAA630-4M8	32,5	60,0	200,0	4 x 9,0*	9/3				

* 4 holes with 30 mm between axes

MTA-C




The barrels of series MTA-C connectors are made from Aluminium of a purity equal to or greater than 99,5%. The barrel is friction welded to the pin thus achieving the best possible transition between the Copper pin and Aluminium barrel.

Barrels are capped and filled with grease so as to avoid oxidation of the Aluminium.

Details of the appropriate crimping tools and dies are shown on pages 235, 237.

BIMETALLIC CONNECTORS

Copper pin - Aluminium barrels

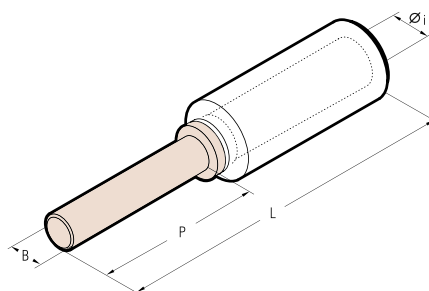

Conductor Size sqmm	Type	Dimensions mm				Quantity Box/Bag	Hydraulic Tools
		Øi	B	P	L		
16	MTA16-C	5,5	8	30	82	90/3	HT131-UC RHU131-C B1300-UC
25	MTA25-C	6,5	8	30	82	90/3	
35	MTA35-C	8,0	8	30	82	90/3	
50	MTA50-C	9,0	12	45	97	60/3	
70	MTA70-C	11,0	12	45	97	60/3	
95	MTA95-C	12,5	12	45	97	60/3	
120	MTA120-C	13,7	14	55	125	30/3	
150	MTA150-C	15,5	14	55	125	30/3	
185	MTA185-C	17,0	14	55	125	24/3	
240	MTA240-C	19,5	14	55	125	24/3	