


Architecture

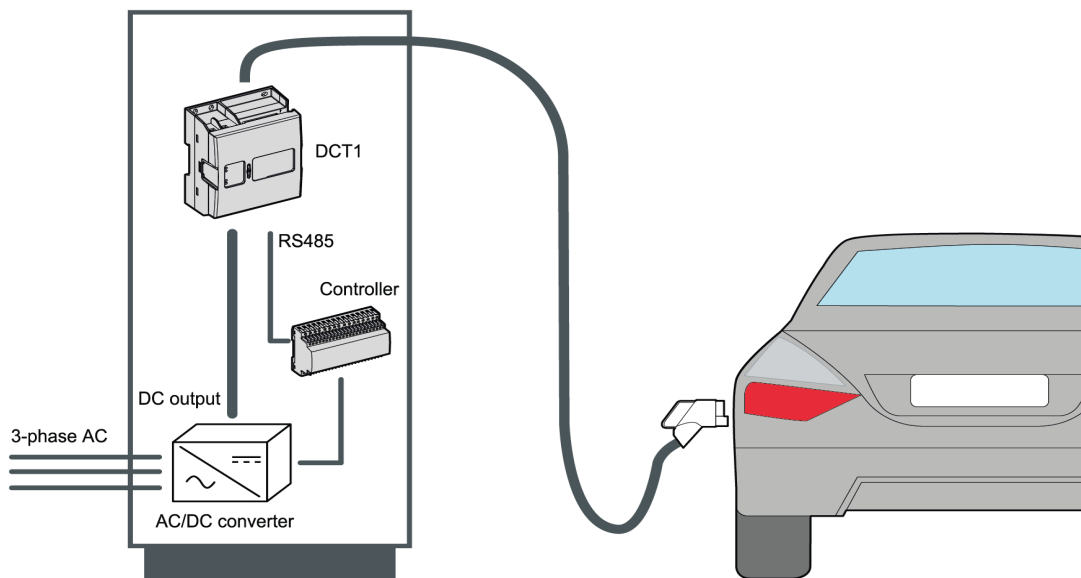

Main functions



- Measure energy and ampere-hour
- Measure power, voltage and current
- Measure the load run hours and the total on-time
- Transmit data to controller or other systems through Modbus RTU or SML
- Signed data transmission (certified versions)
- Monitor internal temperature to help controller avoiding over-heating of the DCT1 and the power cables
- Cable loss compensation

Main features

- Variables (V, A, W)
- Energy resolution 0.0001 kWh
- Data refresh time: 200 ms (Modbus RTU), automatic data push every 200 ms in SML version
- Continuous sampling of voltage and current
- Evaluation certificate for Eichrecht approval
- cULus approved

UCS software

- Free download from Carlo Gavazzi website
- Configuration through RS485 from PC or trough UWP3.0 via LAN or the web (UWP Secure Bridge function)
- Setups can be saved offline for serial programming with a single command
- Real time data view for testing and diagnostics

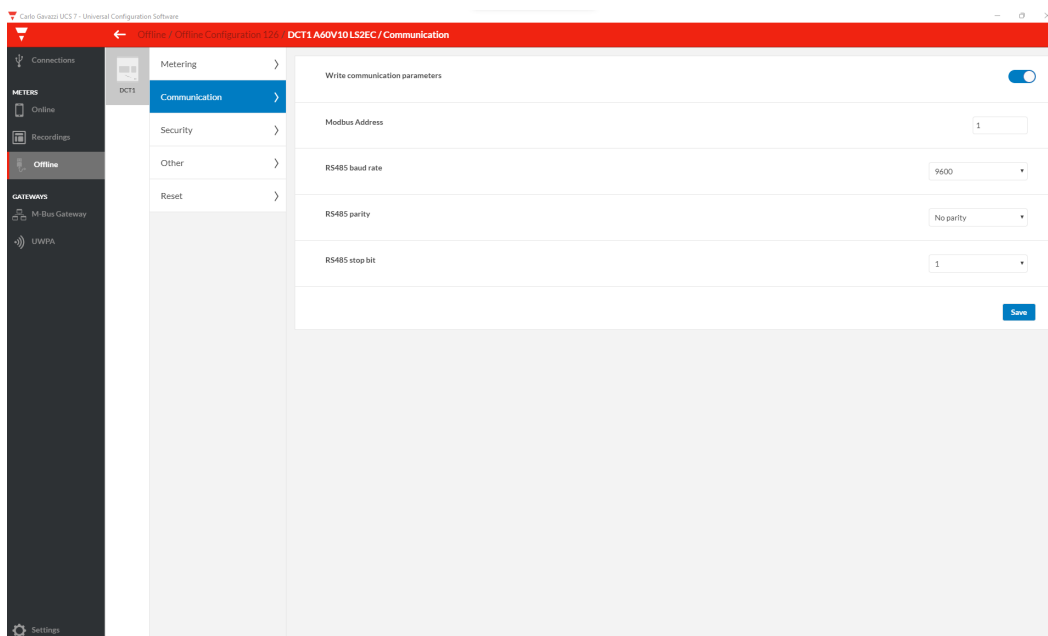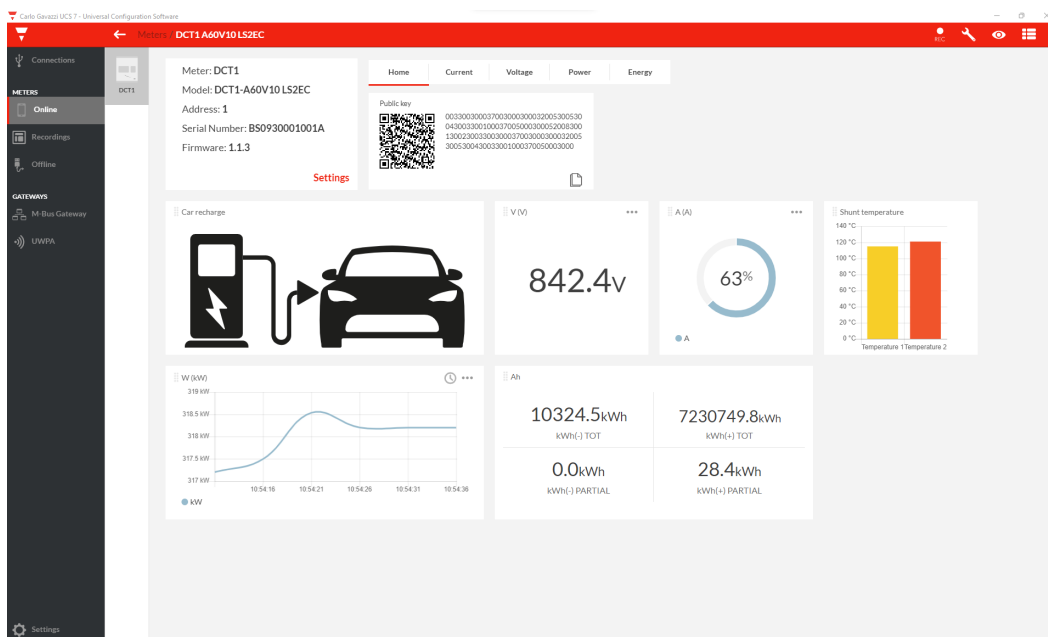

Installation flexibility

DCT1 is designed to achieve maximum installation flexibility. Here you can see 3 examples:

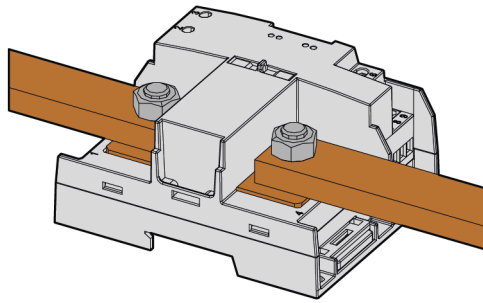


Fig. 1 Bar-bar mounting

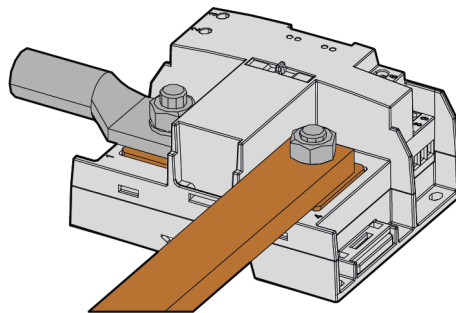


Fig. 2 Horizontal screw-bar mounting

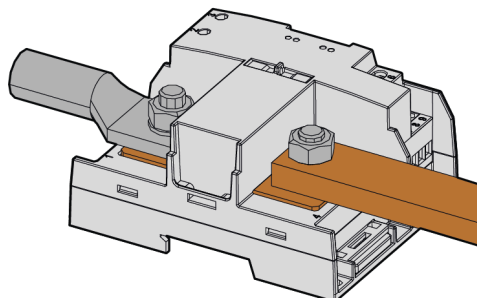


Fig. 3 Vertical screw-bar mounting

Structure

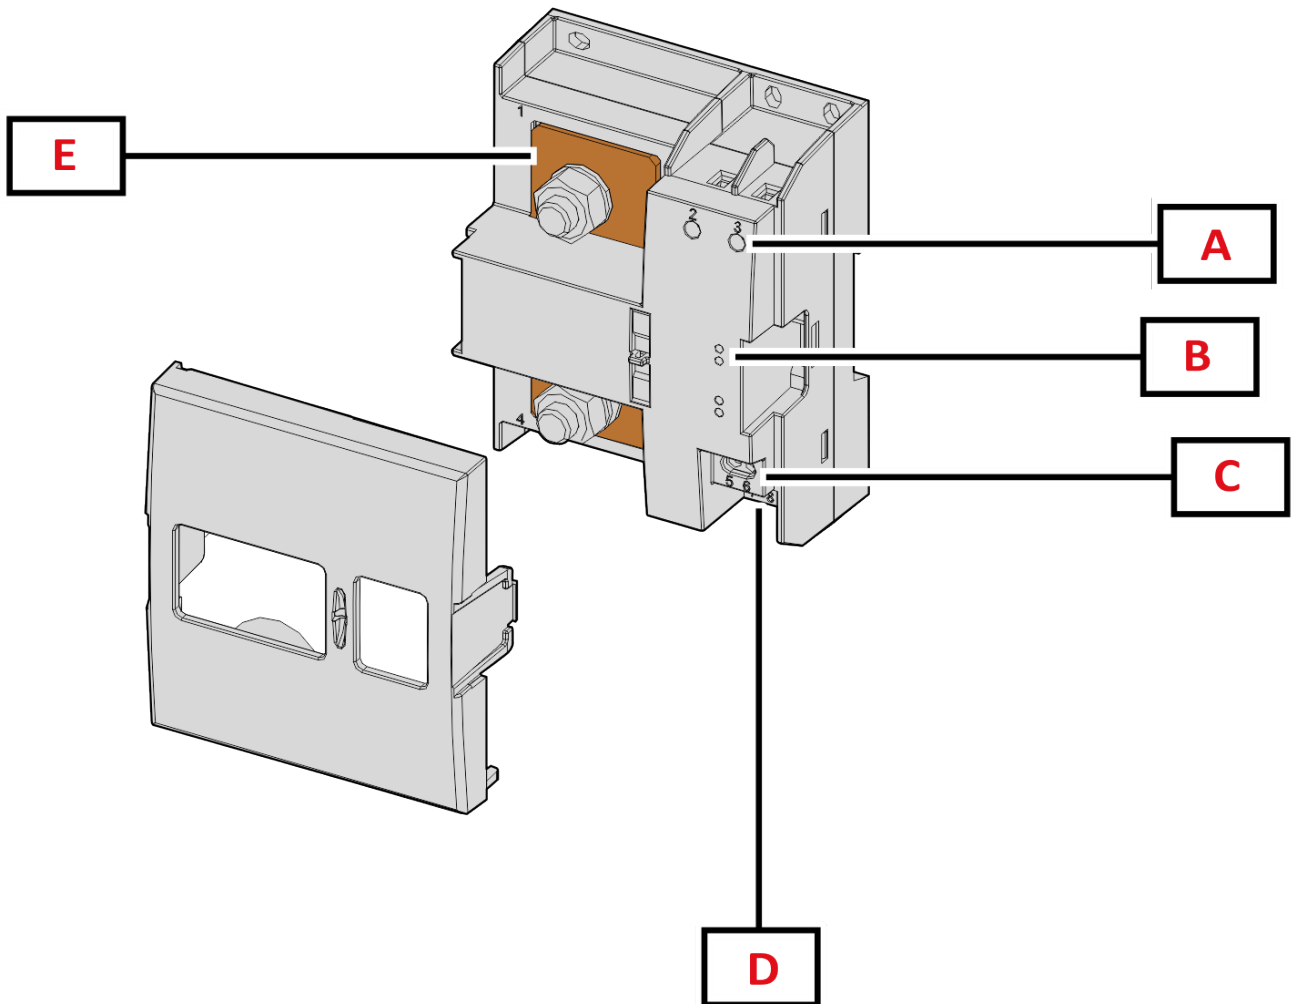


Fig. 4 Front

Area	Description
A	Voltage inputs
B	LEDs
C	Power supply
D	RS485 port
E	Current inputs

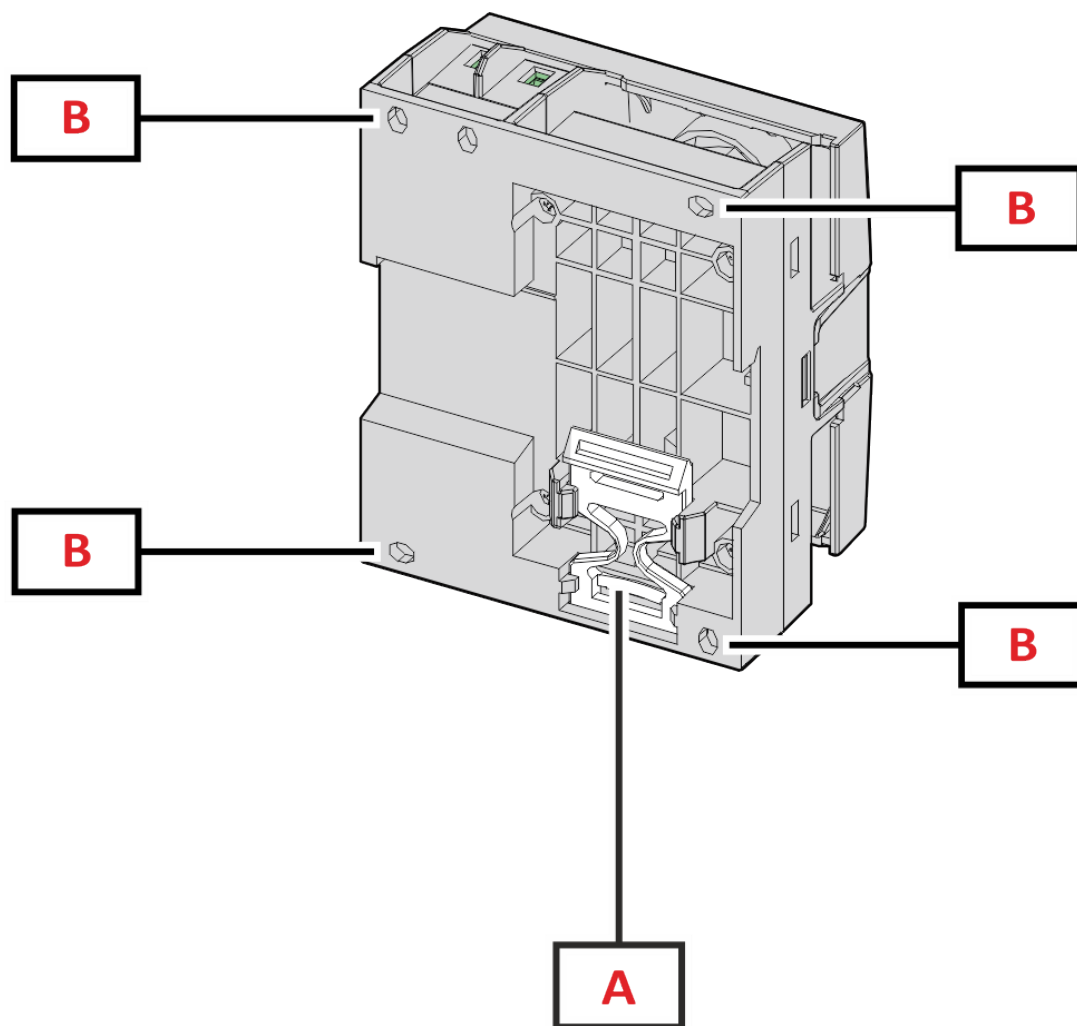


Fig. 5 Back

Area	Description
A	Bracket for DIN rail mounting (optional)
B	Holes for back panel mounting by screw terminals (mandatory)

Features

General

Material	Housing: PBT
Protection degree*	IP10
Protective class	II
Terminals	Current inputs: cable or lug. Max: 50x10 mm; M10 hole; recommended torque: 20 Nm/177 lb-in Voltage, power supply and RS485 port: min: 0.5 mm ² /20 AWG, max: 2.5mm ² /13 AWG 0.5 Nm /4.4 lb-in max
Overvoltage category	Cat. II
Rated impulse voltage	6kV
Pollution degree	2
Mounting	DIN rail and back panel by screw terminals
Weight	565 g/ 1.25 lb (package included)

(*)**Note:** the product can only be installed inside a cabinet with IP54 degree of protection for outdoor installation and IP51 for indoor installation.

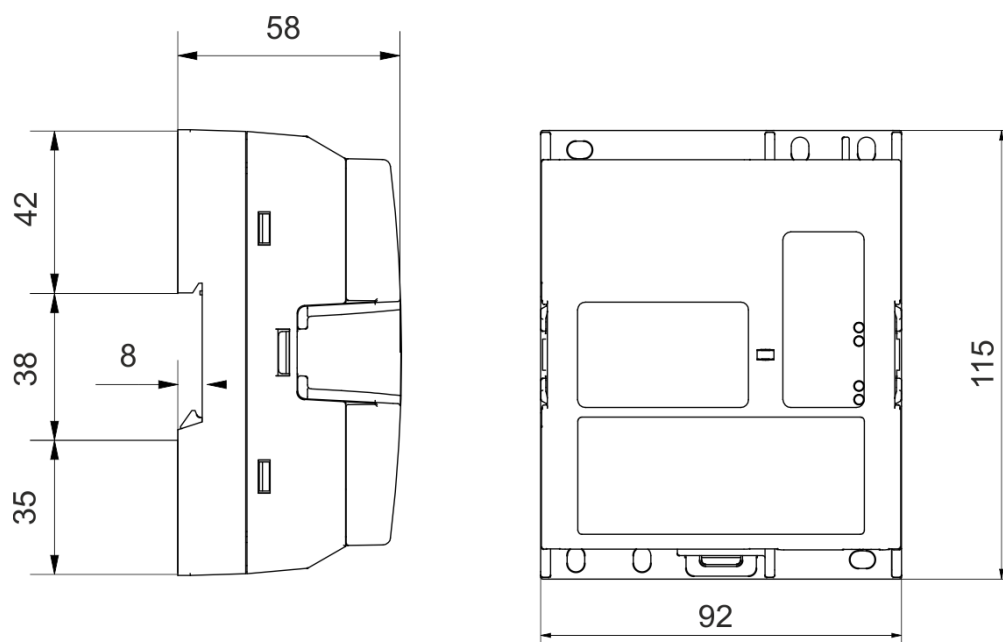


Fig. 6

Environmental specifications

Operating temperature	From -25 to +70 °C/from -13 to +158 °F
Storage temperature	From -40 to +85 °C/from -40 to +185 °F
Max temperature on shunt	120 °C / 248 °F
Mechanical environmental condition	M2




Note: R.H. < 90 % non-condensing @ 40 °C / 104 °F.

Input and output insulation

Type	Measurement inputs	RS485 serial port	Power supply
Measurement inputs	-	Double/Reinforced	Double/Reinforced
RS485 serial port	Double/Reinforced	-	Functional
Power supply	Double/Reinforced	Functional	-

According to: EN 61010-2-030. Overvoltage category III with 600 V mains, category II with 1000 V mains. Pollution degree 2.

Compatibility and conformity

European directives	2014/35/EU (LVT - Low Voltage) 2014/30/EU (EMC - Electro Magnetic Compatibility) 2011/65/EU, 2015/863/EU(Electric-electronic equipment hazardous substances)
Standards	Electromagnetic compatibility (EMC) - emissions and immunity: EN 61000-6-2, EN 61000-6-3, IEC 62052-11 Electrical safety: EN 61010-1, IEC 62052-31, UL 61010-1, UL 61010-2-030, CAN/CSA-C22.2 No. 61010-1-12, CSA C22.2 No. 61010-2-030 Metrology: IEC 62053-41*, VDE Anwendungsregel VDE-AR-E 2418-3-100 Annex A (Accuracy class A) Security: WELMEC 7.2 (SW)
Approvals	  

(*) Except for durability test

Evaluation certificate

The evaluation certificate is provided by an independent notify body, which performs tests and verifications to fulfill the following standards:

Standard	Description
IEC 62052-11	Electricity metering equipment (AC) - General requirements, tests and test conditions - Part 11: Metering equipment
IEC62052-31	Electricity metering equipment (AC) - General requirements, tests and test conditions - Part 31: Product safety requirements and tests
IEC62053-41*	Electricity metering equipment - Particular requirements - Part 41: Static meters for DC energy (classes 0,5 and 1)
VDE-AR-E 2418-3-100 Annex A	Electric mobility - Measuring systems for charging stations
WELMEC 7.2	Software Guide (Measuring Instruments Directive 2014/32/EU)

(*) Except for durability test

Electrical specifications

Electrical system	
Managed electrical system	DC

Voltage inputs	
Voltage connection	Direct
Rated voltage (Un)	150 to 1000 V
Voltage tolerance	From 0.8 to 1.15 Un
Input impedance	3.2 MΩ

Current inputs	300 A	600 A
Current connection	Direct	Direct
Base current (Ib)	50 A	120 A
Minimum current (Imin)	2.5 A	6 A
Threshold current (Itr)	5 A	12 A
Maximum current (Imax)	300 A	600 A
Start-up current (Ist)	0.2 A	0.48 A
Input impedance	0,05 mΩ	0,025 mΩ

Power supply

Type	Auxiliary power supply
Consumption	< 0.9 W
Voltage	12 to 24 V dc

Measurements

Method	TRMS measurements of distorted waveforms
Energy update rate	10 ms

Available measurements

Active energy	Unit
Imported (+) Total	kWh+
Imported (+) partial	kWh+
Exported (-) Total	kWh-
Exported (-) partial	kWh-

Ampere-hour	Unit
Imported (+) Total	Ah+
Imported (+) partial	Ah+
Exported (-) Total	Ah-
Exported (-) partial	Ah-

Run hour meter	Unit
Total (kWh+)	hh:mm
Partial (kWh+)	hh:mm
Total (kWh-)	hh:mm -
Partial (kWh-)	hh:mm -
Total ON time	hh:mm
Partial ON time	hh:mm

Electrical variable	Unit
Voltage L-L	V
Current	A
Power	W

Shunt temperature	Unit
Upstream	°C
Downstream	°C

Energy metering

Energy metering depends on the measurement type you chose (selectable in non-certified models, according to the model in certified models).

Easy connection

Easy connection function: irrespective of the current direction, the power always has a plus sign that increases the positive energy meter. The negative energy meter is not available.

Bidirectional

Bidirectional: voltage, current, and power are measured using the proper sign. The positive or the negative energy increases according to the power sign.

Measurement accuracy

Current	IEC 62053-41*	VDE-AR-E 2418-3-100 Annex A
From Itr to I _{max}	± 0.5% rdg	± 1%
From I _{min} to Itr A	± 1% rdg	± 1.5%

Voltage	IEC 62053-41*	VDE-AR-E 2418-3-100 Annex A
From U _n min -20% to U _n max +15%	± 0.5% rdg	± 0.5%

Power	IEC 62053-41*	VDE-AR-E 2418-3-100 Annex A
From Itr to I _{max}	± 1% rdg	± 2%
From I _{min} to Itr A	± 1.5% rdg	± 2.5%

Energy	IEC 62053-41*	VDE-AR-E 2418-3-100 Annex A
Class	class 1	class A

(*) Except for durability test

Measurement resolution

Variable	Resolution by serial communication
Energy	0.0001 kWh
Ampere-hour	0.001 Ah
Power	0.0001 kW
Current	0.001 A
Voltage	0.1 V
Run-hour meter	1 s
Shunt temperature	0.1 °C

 LED

Front	Green. Status: power on and communication Amber. Warning: overrange (temperature, current or voltage) or fatal error Red kWh+. Pulse weight: proportional to energy consumption: 0.001 kWh per pulse Red kWh-. Pulse weight: proportional to exported energy: 0.001 kWh per pulse
--------------	--

Communication ports

Modbus RTU (S1, S2, S3 versions)

Protocol	Modbus RTU
Devices on the same bus	Max 247 (1/8 unit load)
Communication type	Multidrop, bidirectional
Connection type	2 wires
Configuration parameters	Modbus address (from 1 to 247) Baud rate (9.6 / 19.2 / 38.4 / 115.2 kbps) Parity (None/ Even)
Refresh time	≤ 200 ms
Configuration mode	Via keypad or UCS software

SML (K1 version)

Protocol	SML
Devices on the same bus	Max 247 (1/8 unit load)
Communication type	Multidrop, bidirectional
Connection type	2 wires
Configuration parameters	Modbus address (from 1 to 247) Baud rate (9.6 / 19.2 / 38.4 / 115.2 kbps) Parity (None/ Even)
Refresh time	200 ms
Configuration mode	Modbus commands entering maintenance mode

Connection Diagrams

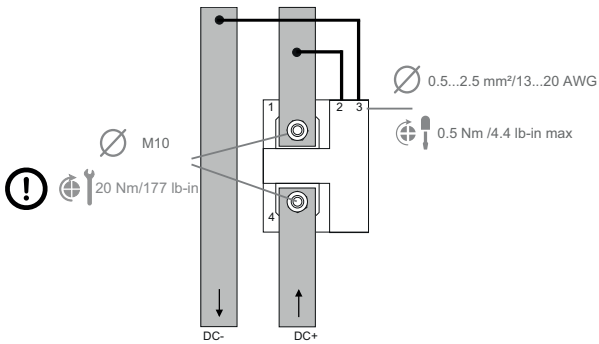


Fig. 7 Current (option A) and voltage inputs

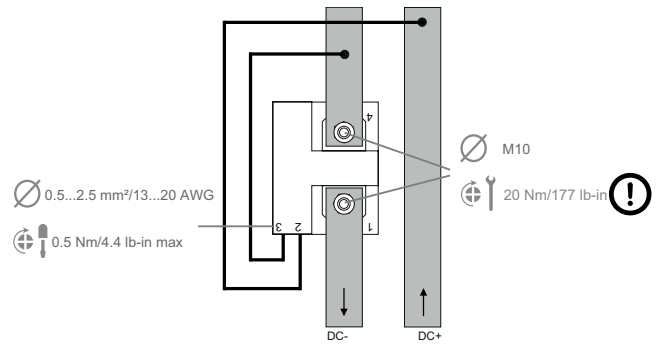


Fig. 8 Current (option B) and voltage inputs

Communication and power supply

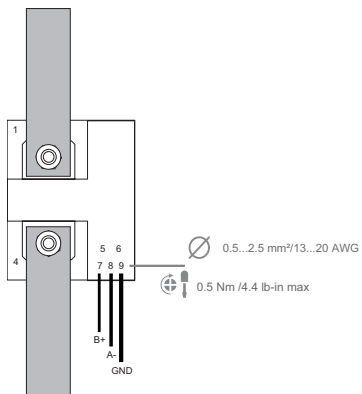


Fig. 9 RS485 Modbus or SML port

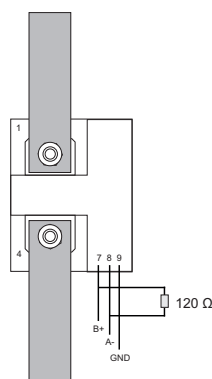


Fig. 10 RS485 terminalization. Last device on RS485

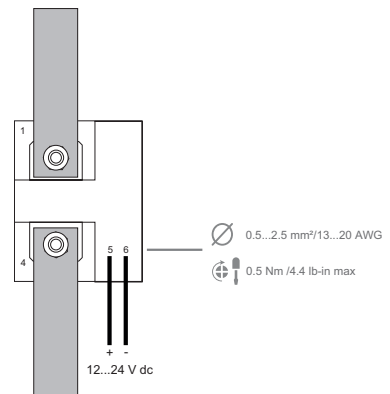


Fig. 11 Power supply

References

Order code

DCT1 V10 L S1 X

Enter the code option instead of

Code	Options	Description
DCT1	-	Model
<input type="checkbox"/>	A30	Max current: 300 A
	A60	Max current: 600 A
V10	-	Max voltage: 1000 V
L	-	Power supply: 12...24 V dc
S1	-	RS485 Modbus RTU
X	-	Standard model

DCT1 V10 L EC

Enter the code option instead of

Code	Options	Description
DCT1	-	Model
<input type="checkbox"/>	A30	Max current: 300 A
	A60	Max current: 600 A
V10	-	Max voltage: 1000 V
L	-	Power supply: 12...24 V dc
<input type="checkbox"/>	S2	RS485 Modbus RTU (256-bit signature)
	S3	RS485 Modbus RTU (384-bit signature)
	K1	SML
EC	-	Evaluation certificate according to IEC 62052-11, IEC 62052-31, IEC 62053-41*, VDE-AR-E 2418-3-100 Annex A and WELMEC 7.2

(*) Except for durability test



COPYRIGHT ©2023
Content subject to change. Download the PDF: www.gavazziautomation.com