


for Polycarbonate insulated chain connectors



Electro-pneumatic, production bench press, controlled by a foot operated pedal. Producing a consistent and reliable crimped connection. Interchangeable application heads available to suit the complete range of Polycarbonate insulated connectors.

See pages 12-13 and 19 for types and features of the insulated chain connectors and end sleeves.

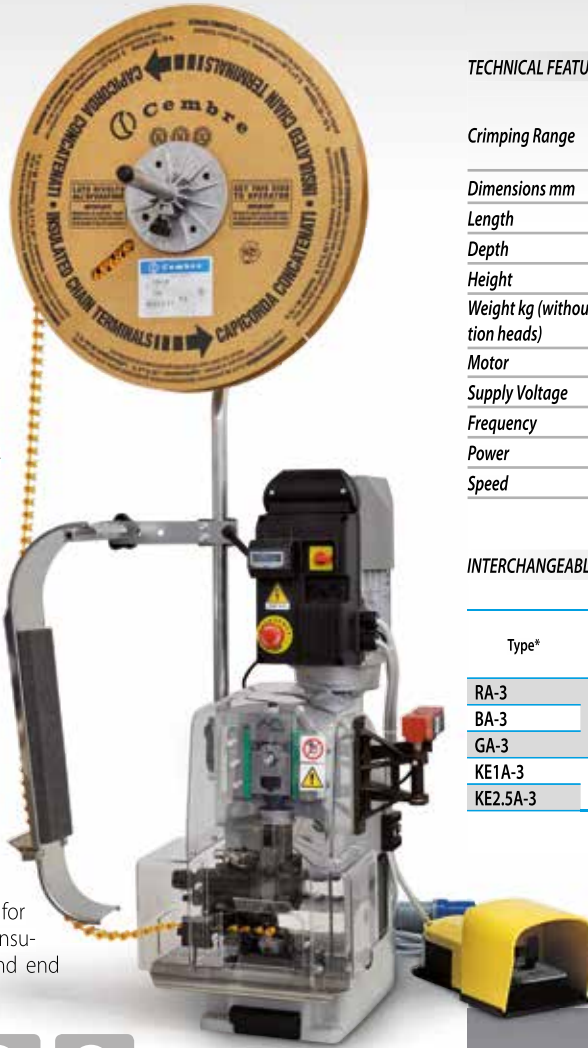

### TECHNICAL FEATURES

|                                       |   |
|---------------------------------------|---|
| <b>Crimping Range</b>                 | Polycarbonate insulated chain terminals 0,25 ÷ 6 mm <sup>2</sup><br>and insulated chain end sleeves 0,5 ÷ 2,5 mm <sup>2</sup> |
| <b>Dimensions mm</b>                  |   |
| Length                                | 180   |
| Depth                                 | 250   |
| Height                                | 620   |
| Weight kg (without application heads) | 41  |
| <b>Motor</b>                          |   |
| Supply Voltage                        | 220 V   |
| Frequency                             | 50 Hz   |
| Power                                 | 0,55 kW/0,75 HP   |
| Speed                                 | 2.800 g/1'  |

### INTERCHANGEABLE APPLICATION HEADS, SIDE ENTRY WITH PNEUMATIC FEED

| Type*    | Connectors                              | Conductor Size sqmm |
|----------|---|---------------------|
| RA-3     | Polycarbonate insulated chain terminals | 0,25÷1,5            |
| BA-3     |   | 1,5÷2,5             |
| GA-3     |   | 4÷6                 |
| KE1A-3   | Insulated chain end sleeves             | 0,5÷1               |
| KE2.5A-3 |   | 1÷2,5               |

\* order as required



Conforms to DIN Standard 46 228/4

