RH50
















HYDRAULIC PRESSHEAD

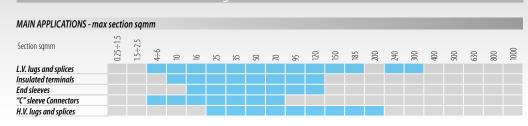

These tools are supplied without dies. For die selection, please refer to chart on pages 248 to 262



50
700
195
75
1,6



STORAGE	
Туре	VAL-P1*
Dimensions mm L x W x H	445 x 290 x 95
Weight kg	1,2
Supplied with the tool	✓
Purchase separately	-

* Suitable for storage of the head and 20 sets of dies

CVB-007
350 x 105
0,13
-
✓



RHM50

RH50 is suitable for installing the same range of connectors as HT51.



















HYDRAULIC PRESSHEAD

MAIN APPLICATIONS - max	section	n sqmr	n																	
Section sqmm	0.25÷1.5	1.5÷2.5	9÷+	10	16	25	35	20	70	95	120	150	185	240	300	400	200	630	800	1000
L.V. lugs and splices Insulated terminals																				
End sleeves																				

These tools are supplied without dies. For die selection, please refer to chart on pages 248 to 262



Hydraulic presshead complete with quick automatic coupler for connection to hydraulic pump with working pressure of 700 bar max, (see page 218-224).

RHM50 is suitable for installing the same range of connectors as RH50.

TECHNICAL FEATURES	
Crimping force kN	50
Max operating pressure bar	700
Dimensions mm	
Length	210
Width	70
Weight kg	1,6



STORAGE	
Туре	VAL-P1*
Dimensions mm L x W x H	445 x 290 x 95
Weight kg	1,2
Supplied with the tool	✓
Purchase separately	-

* Suitable for storage of the head and 20 sets of dies

STORAGE	
Туре	CVB-007
Dimensions mm L x W	350 x 105
Weight kg	0,13
Supplied with the tool	-
Purchase separately	✓

