

Palazzoli

General
Catalogue



2019/2020

Palazzoli



CHIAREZZA DELLA FUNZIONE
SEMPLICITÀ DI PROGETTO
QUALITÀ DELLA MANIFATTURA

CLARITY OF FUNCTION
PROJECT SIMPLICITY
QUALITY OF MANUFACTURE





ZONE	GAS			DUST		
	0	1	2	20	21	22
USABLE			X		X	X

Watertight light fixtures in aluminium alloy suitable for applications in explosion hazardous areas as defined in ATEX Directive 2014/34/EU.

The body of the light fixture is treated with ecological anti-corrosion passivation with fluoro-zirconium and finished with hot polymerised scratch-resistant non-toxic non-ageing polyester painting.

The colour of the body is light grey RAL 7035.


The diffuser is in prismatic tempered glass.

The steel wire protection cage is RAL 2011 deep orange and is attached to the body by means of stainless steel screws while the sealing is guaranteed by a reinforced gasket in non-ageing elastomer.

Predisposed for entry through an M20 cable gland.

Complete with internal and external earth screw.

Compliance with standards
Directive ATEX 2014/34/EU
EN 60079-0
EN 60079-15
EN 60079-31
Directive 2014/35/EU
EN 60598-1
EN 60598-2-1
Directive 2011/65/EU
EN 50581

Atex execution
 **II 3G 2D**
Ex nA IIC T3 Gc
Ex tb IIIC T 75/85/90 °C Db

Casing material **Aluminium alloy**

Surface treatment **Passivation with fluoro-zirconium treatment**

Paint **Hot polymerised non-toxic, non-ageing polyester**

Colour
RAL 7035 (light grey)
Body
RAL 2011 (deep orange)
Protection cage

Diffuser material **Prismatic tempered glass**

Protection rating (IP according to IEC/EN 60529) **IP65**

Protection cage material **Painted tropicalised steel wire**

Supply voltage **230V**

Operating frequency **50-60Hz**

Max conductor cross-section **2.5 mm²**

Entry cable diameter **10 - 14 mm**

Lamp holder type **Type E27 in porcelain**

Insulation class **I**

Operating temperature **-20°C - +40°C**





SUITABLE FOR ZONE 2 (GAS) AND 21-22 (DUST)



Oval light fixtures
in aluminium alloy
with steel protective cage
IP65



Power (W)	Dimensions (mm)	Palazzoli code	Pack Qty
18	199x112	831072EX	1
28	226x130	831172EX	1
53	295x170	831272EX	1

Equipment included: internal and external earth screw and cable gland.




Round light fixtures
in aluminium alloy
with steel protective cage
IP65



Power (W)	Dimensions (mm)	Palazzoli code	Pack Qty
28	200x182	830072EX	1

Equipment included: internal and external earth screw and cable gland.

Light fixture/lamp selection

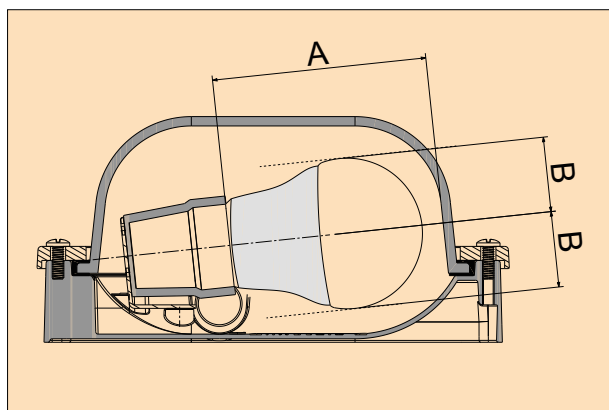

Dimensions

Type bulb	Power (W)	A (mm)	B (mm)
	18	90	38
	28	110	40
	53	168	43
	28	90	38

The background of the entire page is a night-time satellite view of the Earth, showing the illuminated continents of Europe and Africa. A bright sun or star is positioned at the horizon, creating a lens flare effect. Overlaid on this image is a network of glowing blue lines connecting various points, resembling a global communication or data network. The Palazzoli logo is prominently displayed at the top center.

Palazzoli

— excellence —
FROM ITALY

Palazzoli S.p.A
25128 Brescia - Italy - Via F. Palazzoli, 31
Tel +39 030 2015.1
Fax +39 030 2015.258
www.palazzoli.com
export@palazzoli.com
