

..... pag. 321 STRIKER200



STRAL

318







design: ufficio tecnico Stral / Stral technical department

## STRIKER200

### Corpo

Corpo in acciaio inox AISI 316L, disponibile con finitura satinata o elettrolucidata.  
Palo in acciaio inox AISI 316L spesso 3mm con portella a filo.  
Cornice a filo in acciaio inox AISI 316L.  
Viti in acciaio inox A4.  
Guarnizioni in gomma siliconica.  
Diffusore in vetro temperato extra-chiaro di spessore 4 mm.  
Verniciatura del corpo disponibile in vari colori su richiesta.

### Sorgenti

Lampada a fluorescenza da 26W e da 32W con attacco GX24q-3.  
Lampada a ioduri metallici da 35W con attacco G12.  
Versione a LED disponibile a richiesta.

### Emissioni

Ottica in alluminio con distribuzione medium e wide.  
Disponibili diverse distribuzioni a richiesta.

### Alimentazione

Alimentatore elettronico integrato.  
220-240 Vac 50/60Hz  
Classe d'isolamento II.

### Installazione

Installazione a palo mediante staffa in acciaio inox AISI 316L, con possibilità di montare 1 o 2 apparecchi illuminanti.  
Morsettiera con fusibili accessibile dalla portella di servizio.

### Body

Body in AISI 316L stainless steel available with satin or electropolished finish.  
Pole in AISI 316L stainless steel with a thickness of 3 mm and flush cover door.  
Flush frame in AISI 316L stainless steel.  
Screws in A4 stainless steel.  
Silicone rubber gasket.  
Diffuser in extra clear tempered glass with a thickness of 4 mm.  
Painting process of the body in different colors is available on demand.

### Sources

TC TEL compact fluorescent lamp, from 26W to 32 W with GX24q-3 lamp holder.  
Metal halide lamp, 35 W, with G12 lampholder.  
LED version available on demand.

### Emissions

Optics in aluminum with medium and wide light distribution.  
Different light distributions available on demand.

### Supply


Electronic power supply included.  
220-240 Vac 50/60 Hz.  
Class of insulation II.

### Installation

Installation on pole through a bracket in AISI 316L stainless steel, that allows the installation of one or two pole tops.  
Terminal board with fuses easy accessible from the service cover door.

# STRIKER200

versione H 400 / version H 400

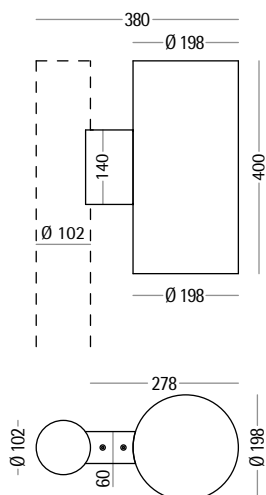

IK09

IP66



## TC-TEL

Alimentatore elettronico incluso  
*Electronic ballast included*

121.0001 TC-TEL 26W GX24q-3

121.0002 TC-TEL 32W GX24q-3



## HIT

Alimentatore elettronico incluso  
*Electronic ballast included*

121.0004 HIT 35W G12 - MEDIUM

121.0005 HIT 35W G12 - WIDE

Versione LED disponibile su richiesta  
*LED version available on demand*