

general features

MAIN APPLICATIONS - max section sqmm

Section sqmm	0.25÷1.5	1.5÷2.5	4÷6	10	16	25	35	50	70	95	120	150	185	200	240	300	400	500	630	800	1000
L.V. lugs and splices																					
Insulated terminals																					
End sleeves																					
"C" sleeve Connectors																					
H.V. lugs and splices																					

These tools are supplied without dies. For die selection, please refer to chart on pages 248 to 262



TECHNICAL FEATURES

Crimping force kN	57.7
Dimensions mm	
Length	359
Height	358
Width	83
Battery	18.0V 5.2Ah
Weight kg (with Battery)	5,3

STORAGE

Type	VAL-P40
Dimensions mm L x W x H	520 x 432 x 126
Weight kg	2,6
Supplied with the tool	✓
Purchase separately	-

The tool is supplied as:

- Basic tool with battery and shoulder strap
- Spare battery
- Battery charger
- USB cable
- Plastic carrying case suitable for storing the tool and accessories



The next generation of Cembre cordless hydraulic tools represents a significantly advantageous evolution from current models.


The B550, with adapter AU55-50, will accept all Cembre 50 kN dies; with adapter AU55-W it will accept "W" dies.

Equipped with Li-Ion 18.0V - 5.2Ah rechargeable high capacity batteries.


The OLED display provides essential real time tool operating information data including:

- Crimping pressure and force being generated, for confirmation of adherence to norms and best practice
- Battery power availability
- Tool identification, LED work light state, reset, no. of operational and service crimping cycles
- Tool service required to maintain optimum condition.

With adapter AU55-50 for accepting Cembre dies.

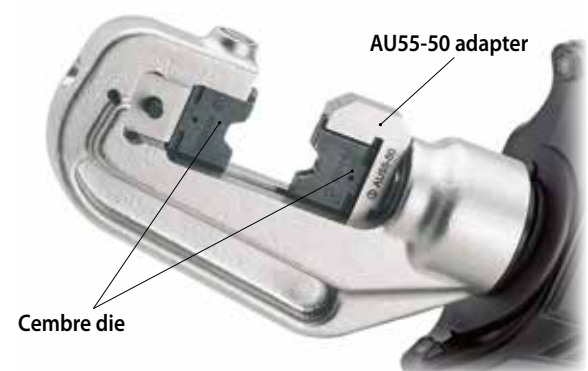

With adapter AU55-W for accepting "W" dies.

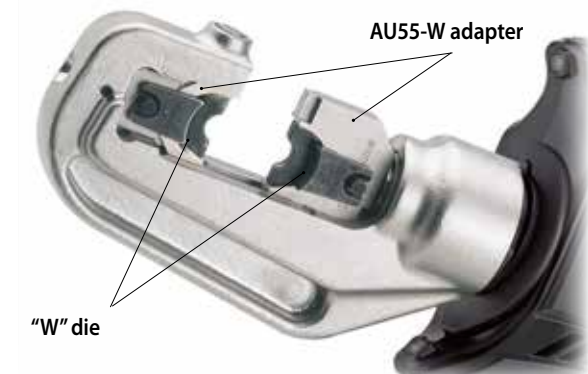

B550-KV version also available for Power Supply Companies