


Extract



GENERAL
CATALOGUE

2014-2015

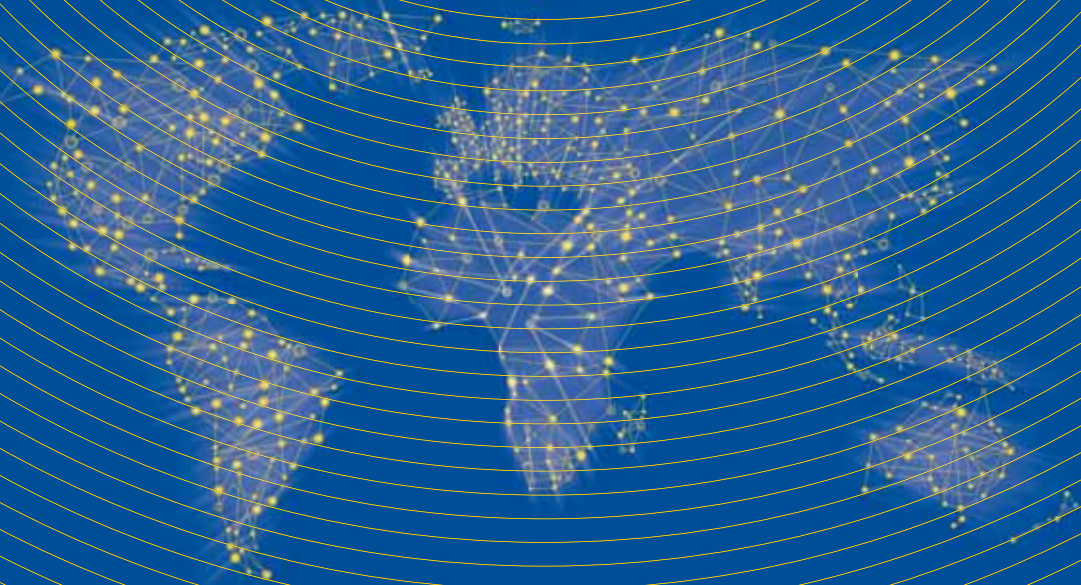

Palazzoli
Leading Electrotechnology



Suitable for hypermarkets, hotels, schools, offices, hospitals, kitchens, trade fairs and production areas.



Simple to select
and easy to install

THE ADVANTAGES



The flange has been reinforced with strengthening ribs on the back in order to allow a better grip and resistance to mechanical stress. The IP rating is preserved over time.




All industrial sockets can be equipped with an auxiliary contact that allows for remote signalling of plug connection for industrial automation applications, or in any situation where you may need an additional electrical protection.



topTER system gives you the possibility to complete your plant with domoTER domestic socket series that can be installed using a watertight cover, even with plug connected.



A wide range of boxes and boards provides the ideal solution for any requirement.

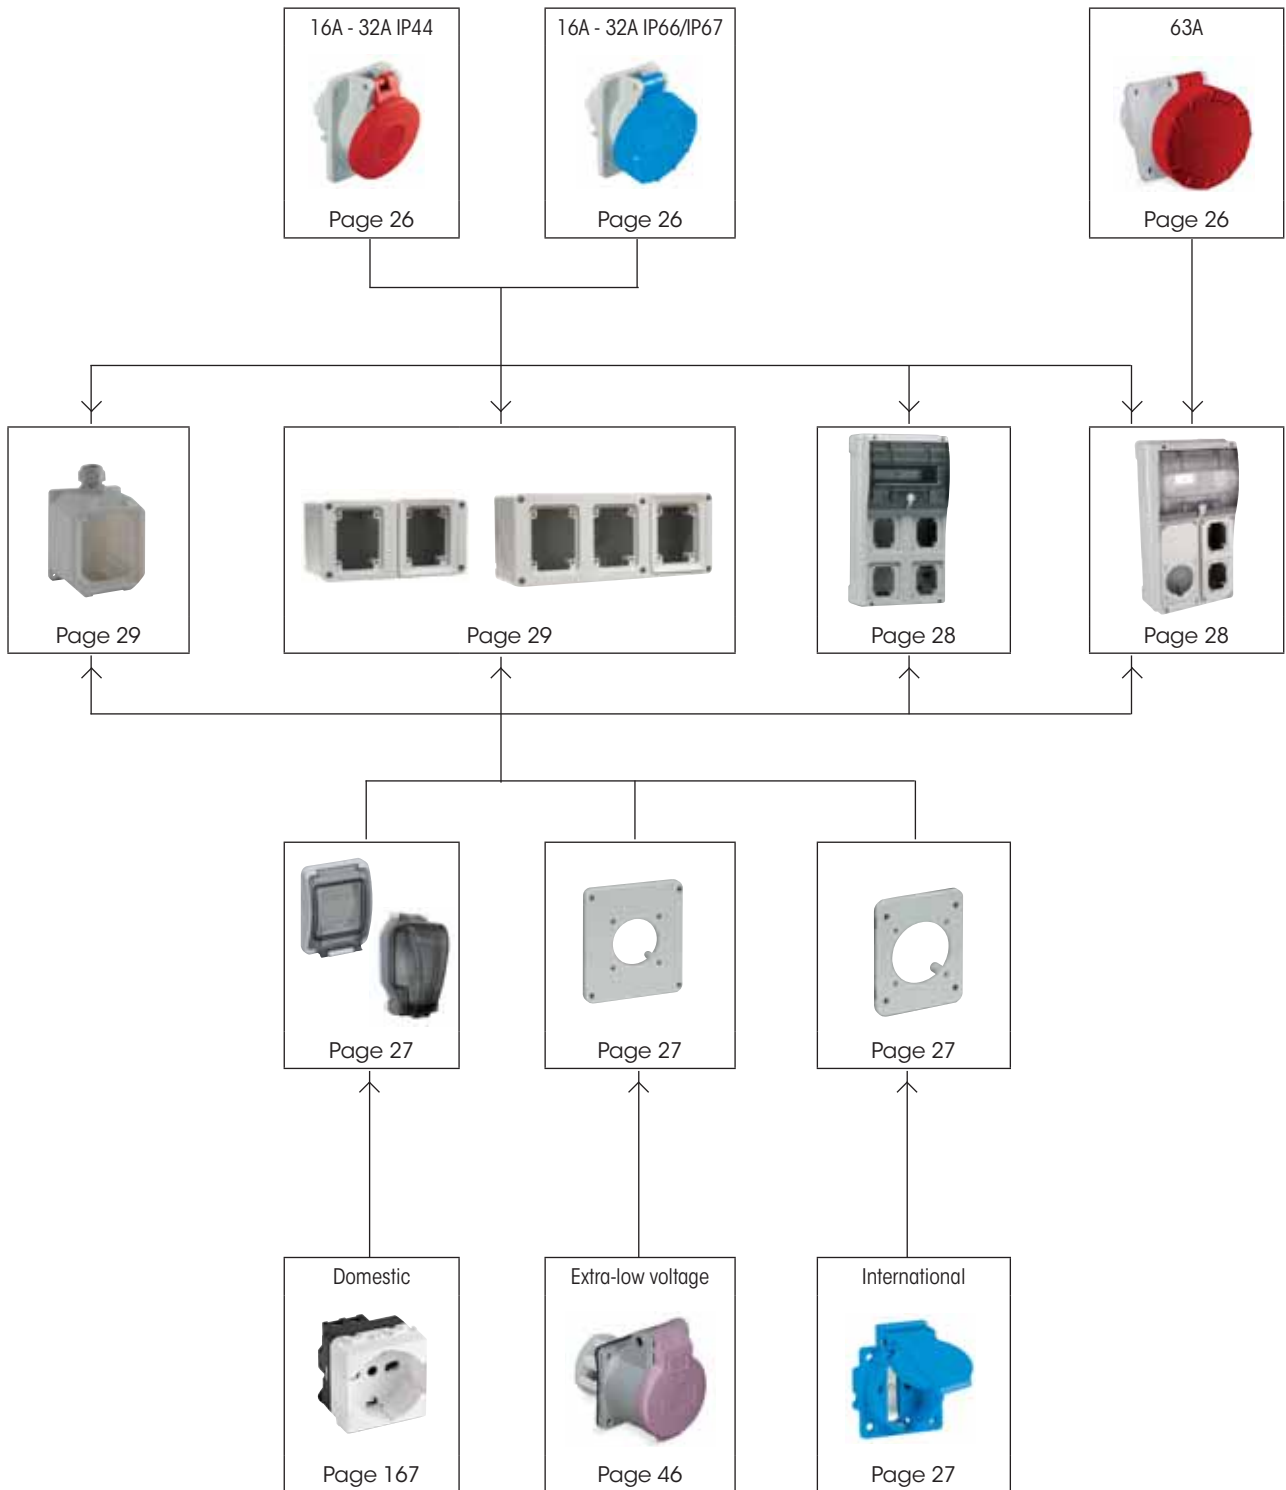

Easy Composer software allows for an easy combining of customized units.
It is available on www.palazzoli.com or directly from the QR Code.





**Distribution boards
with transparent window
for topTER devices
IP66**

	Shape	N. total sockets	Max with 65x83 flange	Max with 88x100 flange	Power dissipation (W)	Palazzoli code	Pack Q.ty
5 modules		2	2	2	22	579822	1
5 modules		3	3	1	22	579823	1
10 modules		4	4	4	40	579824	1
16 modules		6	6	6	56	579826	1
22 modules		8	8	8	70	579828	1

Equipment included: EN 50022 rail kit with adjustable supports.
Cable holders.

Double insulation screw caps. Hinge kit for door opening.

N. 1 closing flange code 579824

N. 2 closing flanges code 579826

N. 2 closing flanges code 579828

Characteristics: padlockable modular door.

Suitable for horizontal and vertical assembly.

Suitable for temporary mounting.

Technical accessories:



**Distribution boards
with transparent window
for topTER devices
and one 63A socket
IP66**

	Shape	N. total sockets	Max with 65x83 flange	Max with 88x100 flange	Max with 100x100 flange	Power dissipation (W)	Palazzoli code	Pack Q.ty
10 modules		3	2	1	1	40	579863	1
16 modules		5	4	2	1	56	579865	1

Equipment included: EN 50022 rail kit with adjustable supports.

Cable holders. Double insulation screw caps. Hinge kit for door opening.

N. 1 closing flange code 579865

Characteristics: padlockable modular door.

Suitable for horizontal and vertical assembly.

Suitable for temporary mounting.

Notes: other combinations available at page 123

Technical accessories:



**EN 50022 rail kit
for topTER distribution boards**

N. EN 50022 modules	For boards with code	Palazzoli code	Pack Q.ty
10	579742 - 579824	579852	1
16	579743 - 579826	579853	1
22	579744 - 579828	579854	1

Equipment included: adjustable supports, 2 wire clamps and fixing screws.

Characteristics: allows the mounting of EN 50022 modules behind the socket-outlet compartments.

CONNESSIONI

PRESE
INTERBLOCCATE

QUADRI E
CASSETTE

COMANDO E
PROTEZIONE

ILLUMINAZIONE

CANTIERE

TUNNEL

ATEX

NAVALE E
APPLICAZIONI

AUTOMAZIONE



Palazzoli S.p.A
25128 Brescia - Italia - Via F. Palazzoli, 31
Tel +39 030 2015.1
Fax +39 030 2015.217
www.palazzoli.com
vendite@palazzoli.com



Timbro del rivenditore