Proximity Inductive Sensors Extended Range, Nickel-Plated Brass Housing Types ICB, M18

Sensing distance: 8 to 14 mm

- Flush and non-flush types
- Short and long body versions
- Rated operational voltage (U_b): 10 36 VDC
- Output: DC 200 mA, NPN or PNP
- Normally open, Normally closed
- LED indication for output ON
- · Protection: reverse polarity, short circuit, transients
- Cable and M12 plug versions
- According to IEC 60947-5-2
- CSA certified for Hazardous Locations

Product Description

A family of inductive proximity switches in industrial standard nickel-plated brass housings. They are able to handle applications where high sensing range is requested.

Output is open collector NPN or PNP transistors.

2) For non-flush mounting in metal

Ordering Key	ICB18SF08NOM1
Type	
Housing style	
Housing material	
Housing size	
Housing length	
Detection principle	
Sensing distance	
Output type	
Output configuration	
Connection	

Type Selection

Connec- tion	Body style	Rated operating distance S _n	Ordering no. NPN Normally open	Ordering no. PNP Normally open	Ordering no. NPN Normally closed	Ordering no. PNP Normally closed
Cable	Short	8 mm ¹⁾	ICB 18 SF 08 NO	ICB 18 SF 08 PO	ICB 18 SF 08 NC	ICB 18 SF 08 PC
Cable	Short	14 mm ²⁾	ICB 18 SN 14 NO	ICB 18 SN 14 PO	ICB 18 SN 14 NC	ICB 18 SN 14 PC
Plug	Short	8 mm ¹⁾	ICB 18 SF 08 NOM1	ICB 18 SF 08 POM1	ICB 18 SF 08 NCM1	ICB 18 SF 08 PCM1
Plug	Short	14 mm ²⁾	ICB 18 SN 14 NOM1	ICB 18 SN 14 POM1	ICB 18 SN 14 NCM1	ICB 18 SN 14 PCM1
Cable	Long	8 mm ¹⁾	ICB 18 LF 08 NO	ICB 18 LF 08 PO	ICB 18 LF 08 NC	ICB 18 LF 08 PC
Cable	Long	14 mm ²⁾	ICB 18 LN 14 NO	ICB 18 LN 14 PO	ICB 18 LN 14 NC	ICB 18 LN 14 PC
Plug	Long	8 mm ¹⁾	ICB 18 LF 08 NOM1	ICB 18 LF 08 POM1	ICB 18 LF 08 NCM1	ICB 18 LF 08 PCM1
Plug	Long	14 mm ²⁾	ICB 18 LN 14 NOM1	ICB 18 LN 14 POM1	ICB 18 LN 14 NCM1	ICB 18 LN 14 PCM1

1) For flush mounting in metal

Specifications

Rated operational voltage (U _b)	10 to 36 VDC (ripple incl.)
Ripple	≤ 10%
Output current (I _e)	≤ 200 mA @ 50°C (≤ 150 mA @ 50-70°C)
OFF-state current (I _r)	≤ 50 μA
No load supply current (I_0)	≤ 15 mA
Voltage drop (U _d)	Max. 2.5 VDC @ 200 mA
Protection	Reverse polarity, short-circuit, transients
Dielectric impulse voltage withstand	1 kV/0.5 J
Power ON delay (t_v)	300 ms
Operating frequency (f)	≤ 1500 Hz
Indication for output ON NO version NC version	Activated LED, yellow Target present Target not present

Indication for short circuit/	
overload	LED blinking
Assured operating	
sensing distance (S _a)	$0 \leq S_a \leq 0.81 \ x \ S_n$
Effective operating	
distance (S _r)	$0.9 \ x \ S_n \leq S_r \leq 1.1 \ x \ S_n$
Usable operating distance (S _u)	$0.9 \ x \ S_r \leq S_u \leq 1.1 \ x \ S_r$
Repeat accuracy (R)	≤ 10%
Differential travel (H)	
(Hysteresis)	1 to 20% of sensing dist.
Shock and vibration	IEC 60947-5-2/7.4
Ambient temperature	
Operating	-25° to +70°C (-13° to +158°F)
Storage	-30° to +80°C (-22° to +176°F)
Housing material	
Body	Nickel-plated brass
Front	Grey thermoplastic polyester




CARLO GAVAZZI

Specifications (cont.)


Connection		Approvals (cont.)	
Cable	2 m, 3 x 0.25 mm ² ,	cCSAus	As Process Control
Plug	grey PVC, oil proof M12 x 1	Note: The terminal connector	Equipment for Hazardous Locations.
Degree of protection	IP 67	(versionM1) was not evalu-	- Class I, Division 2,
Weight (cable/nuts included) Cable Plug	Max. 150 g Max. 70 g	minal connector should be - determined in the end-use A	Groups A, B, C and D. - T5, Enclosure Type 4. Ambient temperature Ta: -25° to +60°C.
Dimensions	See diagrams below		CCC is not required for
Tightening torque Non-flush version	25 Nm		products with a maximum operating voltage of \leq 36 V
Flush version From 1 to 3 mm	15 Nm	CE-marking	Yes
> 3 mm	25 Nm	EMC protection IEC 61000-4-2 (ESD)	According to IEC 60947-5-2 8 KV air discharge,
Approvals UL (cULus), CSA	As Industrial Control Equipment - Proximity Switches. Types 1, 4, 4X or 12. Max ambient temperature 40°C.	IEC 61000-4-2 (ESD) IEC 61000-4-3 IEC 61000-4-4 IEC 61000-4-6 IEC 61000-4-8	4 KV contact discharge 3 V/m 2 kV 3 V 30 A/m

Dimensions

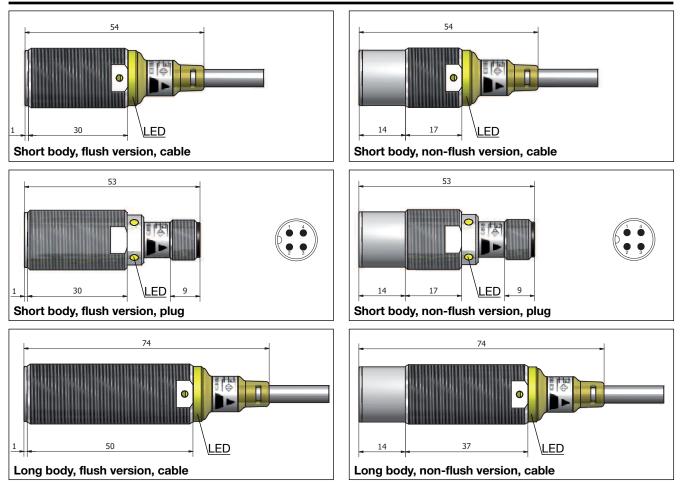


CARLO GAVAZZI

Dimensions (cont.)

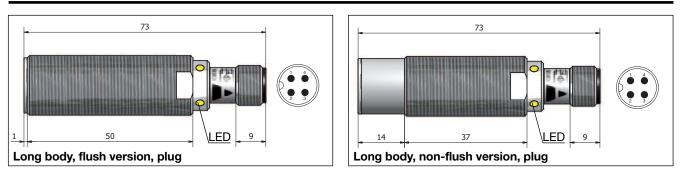


Installation


Flush sensor, when installed in damping material, must be according to Picture 1A.

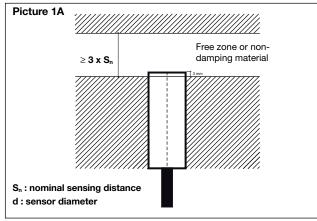


Flush sensors, when installed together in damping material, must be according to Picture 2A.

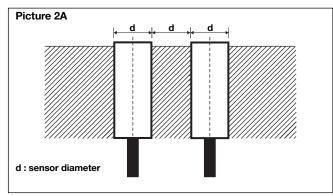


For sensors installed opposite each other, a minimum space of 6 x Sn (the nominal sensing distance) must be observed (See Picture 3).

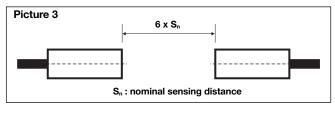

Non-flush sensor, when installed in damping material, must be according to Picture 1B.

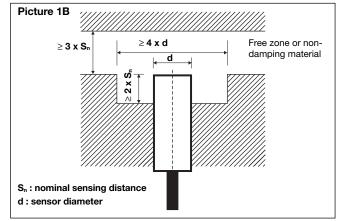



Non-flush sensors, when installed together in damping material, must be according to Picture 2B.

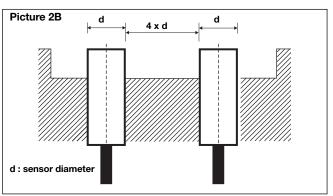





Wiring Diagrams










Reduction factors

The rated operating distance is reduced by the use of metals and alloys other than Fe360.

The most important reduction factors for inductive proximity sensors are shown in Picture 4.

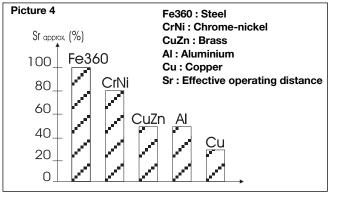

Accessories for Plug Versions

3-wire angled connector, 2 m cable	CONM13NF-A2
3-wire angled connector, 5 m cable	CONM13NF-A5
3-wire angled connector, 10 m cable	CONM13NF-A10
3-wire straight connector, 2m cable	CONM13NF-S2
3-wire straight connector, 5m cable	CONM13NF-S5
For any additional information or different options, please refer to the "General Accessories" datasheets.	n

Delivery Contents

- Inductive proximity switch ICB.
- 2 nuts NPB
- Packaging: plastic bag