


# New range of **H** shape sleeve connectors



www.cembre.com

## H / CLAMPS

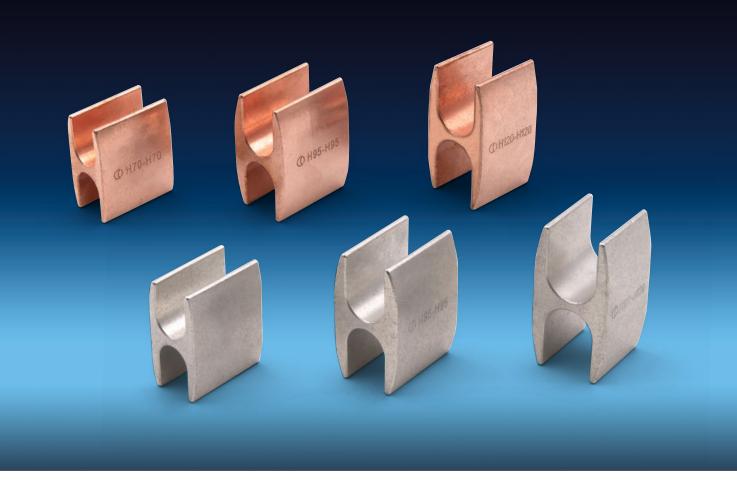

"H" connectors are manufactured from Copper profiles with a purity greater than 99.9% and are suitable for a variety of uses or to create an earthing network.

Each connector is marked as follows:

- Cembre trade mark
- Reference number

"H" connectors are available in uncoated and tin coated version.

#### **Main Features**

- H shape
- For Cu conductors DIN 48201
- Material: Cu ETP (CW004A) according to EN 13605
- Surface: uncoated and tin coated, thickness 3 µm minimum



Cembre die sets

The hydraulic tools are also available in the long C-head version

 $(\mathbf{\hat{N}})$ 



B1350-C and HT131-C Cembre 130 kN hydraulic crimping tools


> **B70M-P36** 36V Portable electro-hydraulic pump

RHC131 130 kN hydraulic presshead

+

## H / CLAMPS





### bright surface version

Conductor Size sqmm		Туре	Dimensions mm				Quantity	Die Set	Hydraulic			
Run	Тар	.,pc	А	В	С	L	Box/Bag		Tools			
70	70	H70-H70	34,0	17,0	10,8	28,0	100/25	MRH26-C	HT131-C and tools	AU220-120D	AU450-130D A	
95	95	H95-H95	40,0	22,0	13,0	30,0	50/25	MRH30-C	and heads with 130 kN crimping force			
120	120	H120-H120	43,0	24,0	15,5	25,0	30/15	MRH32-C				

#### tin plated version

Conductor Size sqmm		Туре	Dimensions mm				Quantity	Die Set	Hydraulic			
Run	Тар	,pc	A	В	С	L	Box/Bag		Tools			
70	70	H70-H70ST	34,0	17,0	10,8	28,0	100/25	MRH26-C	HT131-C and tools and heads with 130 kN crimping force	AU230-130D	with Adaptor w AU450-130D A	
95	95	H95-H95ST	40,0	22,0	13,0	30,0	50/25	MRH30-C				
120	120	H120-H120ST	43,0	24,0	15,5	25,0	30/15	MRH32-C				

Cod. 6260901



www.cembre.com



Cembre S.p.A. via Serenissima, 9 25135 Brescia - Italia Ph: +39 030 36921 Fax: +39 030 3365766 sales@cembre.com

